


AFCRL-67-0238

PS00501

COPY NO. 68

AD655805



A 1680 MHZ ANTENNA FOR A TWENTY-FOUR  
INCH EJECTABLE SPHERE

Project Director

H. W. Haas

Project Engineer

D. G. Henry  
B. T. Buller

Contract No. AF 19(628)-5923

Project 7659, 7043, 6682

Task No. 765901, 668204

Scientific Report No. 1

February 1967

DDC  
RECEIVED  
AUG 8 1967  
RELEASED

Distribution of this document is unlimited B.

CONTRACT MONITOR: Raymond E. Wilton

Prepared for

AIR FORCE CAMBRIDGE RESEARCH LABORATORIES  
OFFICE OF AEROSPACE RESEARCH  
UNITED STATES AIR FORCE  
BEDFORD, MASSACHUSETTS

NEW MEXICO STATE UNIVERSITY  
PHYSICAL SCIENCE LABORATORY  
LAS CRUCES, NEW MEXICO

RECEIVED

AUG 10 1967

CFSTI

**AFCRL-67-0238**

**PS00501**

**PHYSICAL SCIENCE LABORATORY  
NEW MEXICO STATE UNIVERSITY  
Las Cruces, New Mexico**

**A 1680 MHZ ANTENNA FOR A TWENTY-FOUR  
INCH EJECTABLE SPHERE**

**Project Engineer**

**D. G. Henry  
Associate Engineer**

**B. T. Buller  
Assistant Engineer**

**Approved:  
Supervisor  
Electromagnetics Group**

**H. W. Haas  
Senior Engineer**

**Contract No. AF 19(628)-5923**

**Project 7659, 7043, 6682**

**Task No. 765901, 668204**

**Scientific Report No. 1**

**February 1967**

**Distribution of this document is unlimited**

**CONTRACT MONITOR: Raymond E. Wilton**

**Prepared for**

**AIR FORCE CAMBRIDGE RESEARCH LABORATORIES  
OFFICE OF AEROSPACE RESEARCH  
UNITED STATES AIR FORCE  
BEDFORD, MASSACHUSETTS**

### ABSTRACT

The PSL Model 24.006 quadraloop antenna was developed as a 1680 MHz telemetry antenna. The antenna is mounted on an ejectable twenty-four inch sphere, which is ejected from an Arcas type rocket. The antenna is designed to fit inside a nylon housing attached to the metal strut of the sphere. The Model 24.006 antenna was tested for radiation pattern, VSWR and mechanical integrity.

**TABLE OF CONTENTS**

	<b>Page</b>
<b>1.0 Introduction .....</b>	<b>1</b>
<b>2.0 Antenna Description .....</b>	<b>1</b>
<b>3.0 Electrical Tests Conducted .....</b>	<b>1</b>
<b>3.1 Antenna VSWR .....</b>	<b>2</b>
<b>3.2 Radiation Pattern Measurements .....</b>	<b>2</b>
<b>4.0 Mechanical Test Conducted .....</b>	<b>2</b>
<b>5.0 Conclusions .....</b>	<b>2</b>
<b>Bibliography .....</b>	<b>31</b>
<b>Distribution List .....</b>	<b>32</b>

## LIST OF ILLUSTRATIONS

	Page
Fig. 1      PSL Model 24.006 Quadraloop Antenna .....	3
Fig. 2      Assemble View of PSL Model 24.006 Quadraloop Antenna Showing Housing, Collar and Prototype Strut .....	4
Fig. 3      VSWR Versus Frequency for a Model 24.006 Quadraloop Antenna .....	5
Fig. 4      Model 24.006 Antenna Coordinate System .....	6
Figs.      Model 24.006 Antenna Radiation Patterns .....	
5 - 26      .....	7 - 28
Fig. 27      Power Contour Plot of Model 24.006 Antenna, Linear $E_\theta$ Polarization .....	29
Fig. 28      Power Contour Plot of Model 24.006 Antenna, Linear $E_\phi$ Polarization .....	30

## **1.0 INTRODUCTION**

The Aerospace Instrumentation Laboratory of Air Force Cambridge Research Laboratories requested the Physical Science Laboratory to develop a 1680 MHz telemetry antenna for an ejectable twenty-four inch sphere. The sphere is ejected from an Arcas type rocket. The antenna is mounted within a nylon housing attached to one end of the metal supporting strut of the sphere. The Model 24.006 quadraloop antenna was designed, fabricated and tested to fulfill this request.

## **2.0 ANTENNA DESCRIPTION**

A Model 24.006 quadraloop antenna is shown in Fig. 1. The two radiating elements are fed 180 degrees out of phase with equal amplitude. The feed harness consisting of a phasing harness and feed cable is not shown in the figure. Figure 2 shows an assembled view of the nylon housing, antenna and metal strut. The metal strut shown in the figure is a prototype used to determine the antenna's electrical characteristics.

The Model 24.006 antenna consists of two radiating elements fed 180 degrees out of phase. A flat metal plate between the two elements acts as an electrical ground plane and provides mechanical support for the elements through nylon standoffs. Support is provided for the radiating elements, feed connectors and ground plane by a circular, metal base plate.

The antenna is inserted into the housing so that the ground plane is butted against the extreme end (away from the strut) of the housing. Since the antenna is inserted against the extreme end of the housing, a space between the metal strut and base plate results and effectively introduces an unwanted, annular radiator. This unwanted radiator couples with the antenna degrading the radiation pattern and VSWR. Coupling effects of the unwanted radiator are eliminated by grounding the antenna to the strut by means of a metal collar on the outside of the housing. Butting against the strut, the metal collar extends over the edge of the base plate. The collar and antenna are grounded to each other by four screws. Both the collar and antenna are secured to the nylon housing by the four screws.

## **3.0 ELECTRICAL TESTS CONDUCTED**

Electrical tests were conducted on the Model 24.006 antenna to determine its VSWR and radiation pattern characteristics. Since the transmitted rf power is expected to be low, less than one-half watt, the antenna was not tested for rf breakdown.

### 3.1 Antenna VSWR

A plot of VSWR versus frequency for the Model 24.006 antenna is shown in Fig. 3. The plot indicates a minimum VSWR of 1.25:1 at the tuned frequency of 1685 MHz. Bandwidth is  $\pm 25$  MHz from the tuned frequency for VSWR limits of 1.5:1.

The antenna was designed for a center frequency of 1680 MHz.

### 3.2 Radiation Pattern Measurements

Figure 4 depicts the affixed coordinate system used for the radiation pattern measurements of the Model 24.006 antenna. The radiation pattern measurements were recorded for linear  $E_0$  and  $E_\phi$  polarizations. The recorded patterns show a gain of 0 db with respect to isotropic. Gain was determined from a Scientific-Atlantic standard gain horn (Model SGH-1.1) which has a gain of 17 db above isotropic at 1680 MHz.

The radiation pattern contours are suitably smooth. As the patterns indicate, the coverage is good for any orientation of the strut mounted antenna. Figures 5 through 26 are the recorded radiation patterns of the Model 24.006 quadraloop antenna mounted within a nylon housing as indicated in Fig. 2. Figures 27 and 28 are the power contour plots of  $E_0$  and  $E_\phi$ , respectively.

### 4.0 MECHANICAL TEST CONDUCTED

The Model 24.006 quadraloop antenna was vibrated mechanically from 20 to 2000 cps at a magnitude of 15 g's. Three orthogonal planes of the antenna were tested with a sweep time of three (3) minutes for each plane. There were no electrical or mechanical failures.

Total weight of the antennas including the phase harness and feed cable is 70.5 gms.


### 5.0 CONCLUSIONS

The PSL Model 24.006 quadraloop antenna met all electrical and mechanical requirements. The antenna is mounted inside a nylon housing attached to the end of a metal strut of the ejectable sphere. The radiation patterns are extremely satisfactory. The VSWR and bandwidth are quite adequate and the mechanical structure of the antenna is sound. The Model 24.006 antenna should perform the desired data transmission most satisfactorily.



**FIG. 1 - PSL MODEL 24.006 QUADRALOOP ANTENNA**



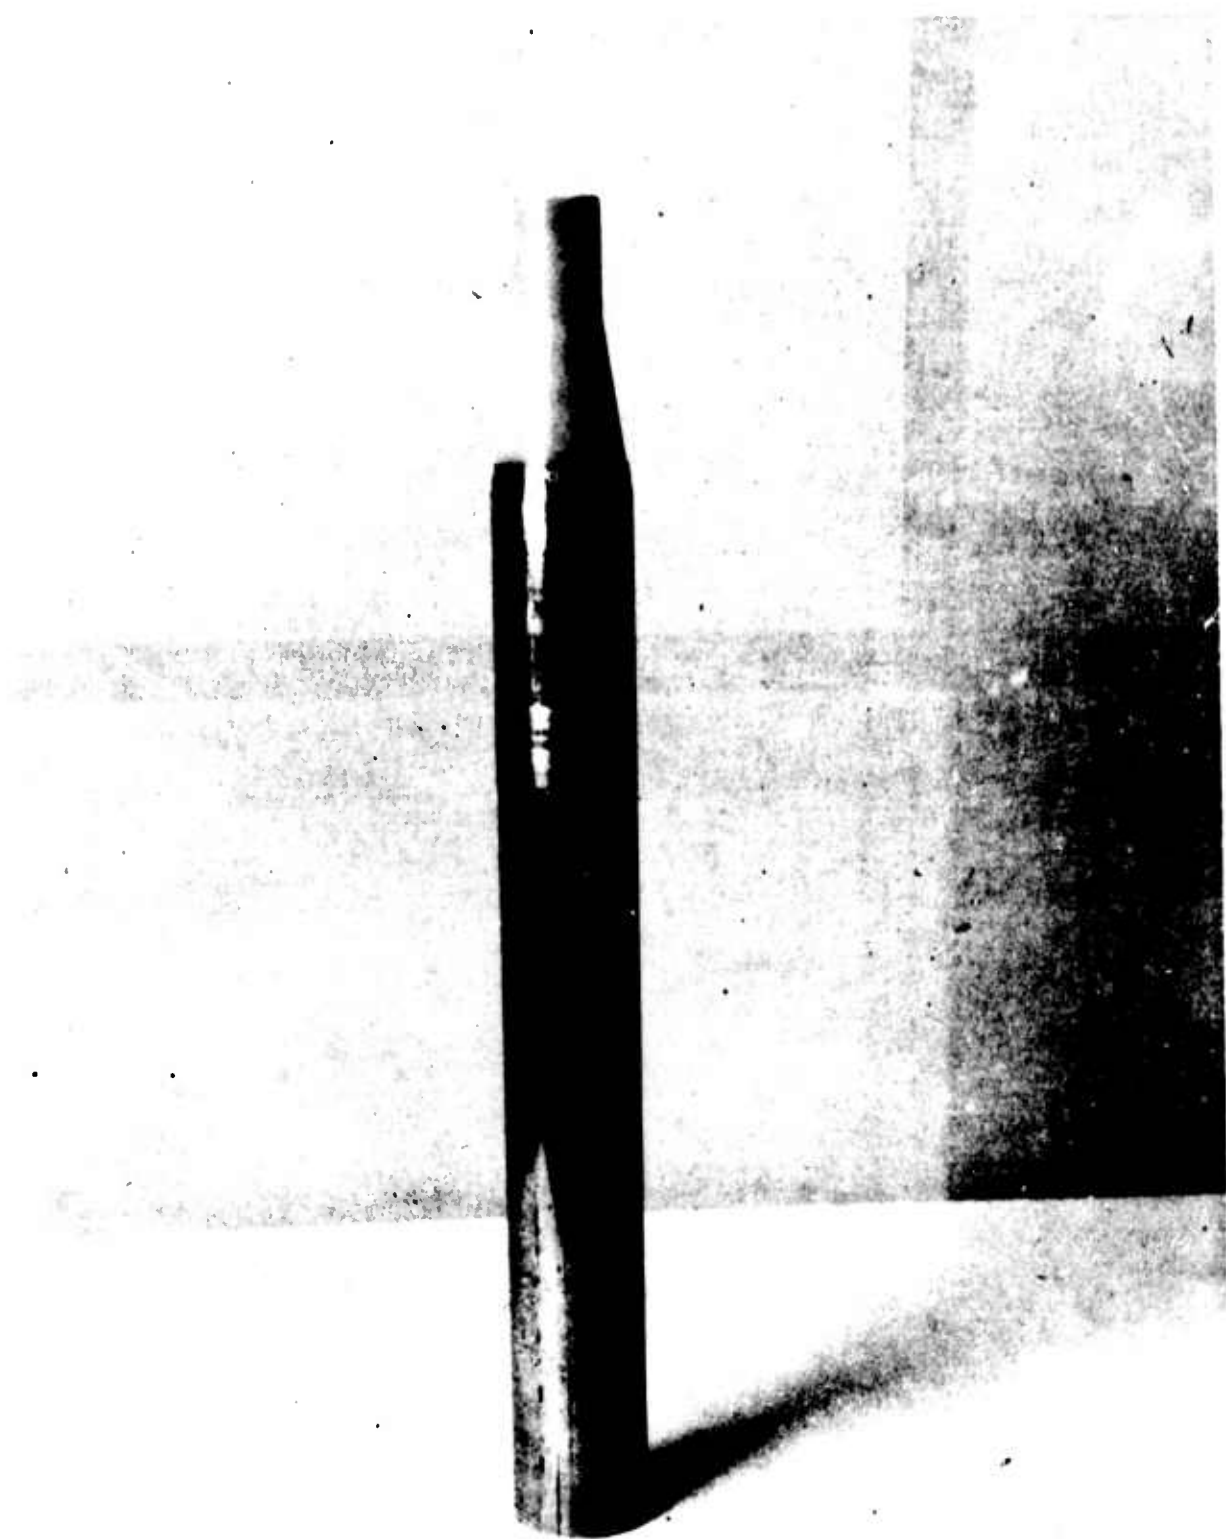

**FIG. 2 - ASSEMBLE VIEW OF PSL MODEL 24.006 QUADRALOOP ANTENNA  
SHOWING HOUSING, COLLAR AND PROTOTYPE STRUT**

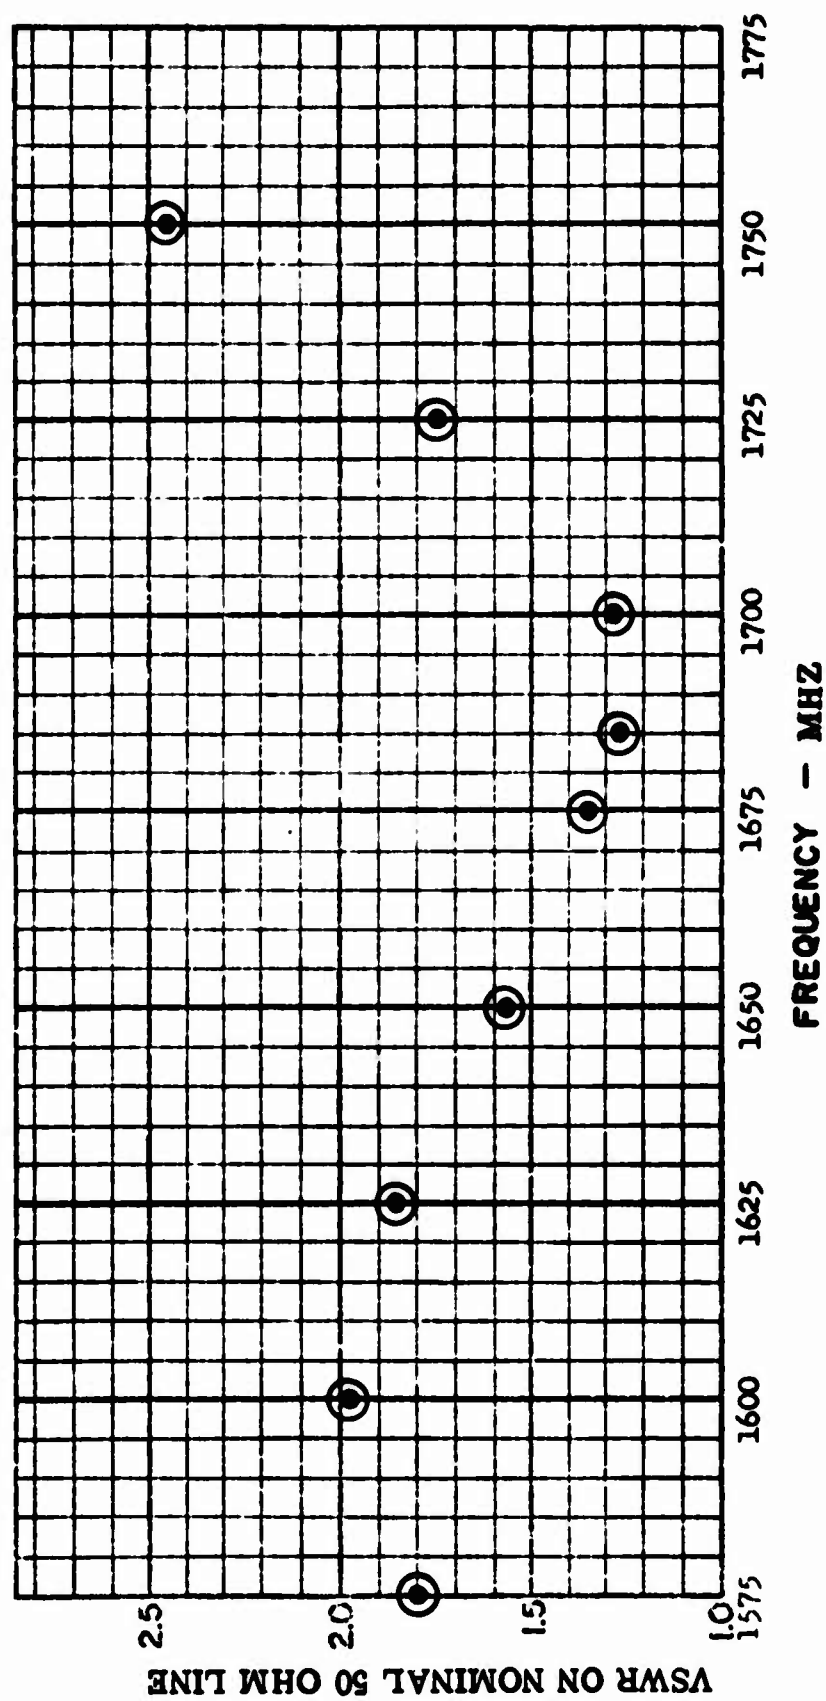


FIG. 3 - VSWR VERSUS FREQUENCY FOR A MODEL 24.006 QUADRALOOP ANTENNA

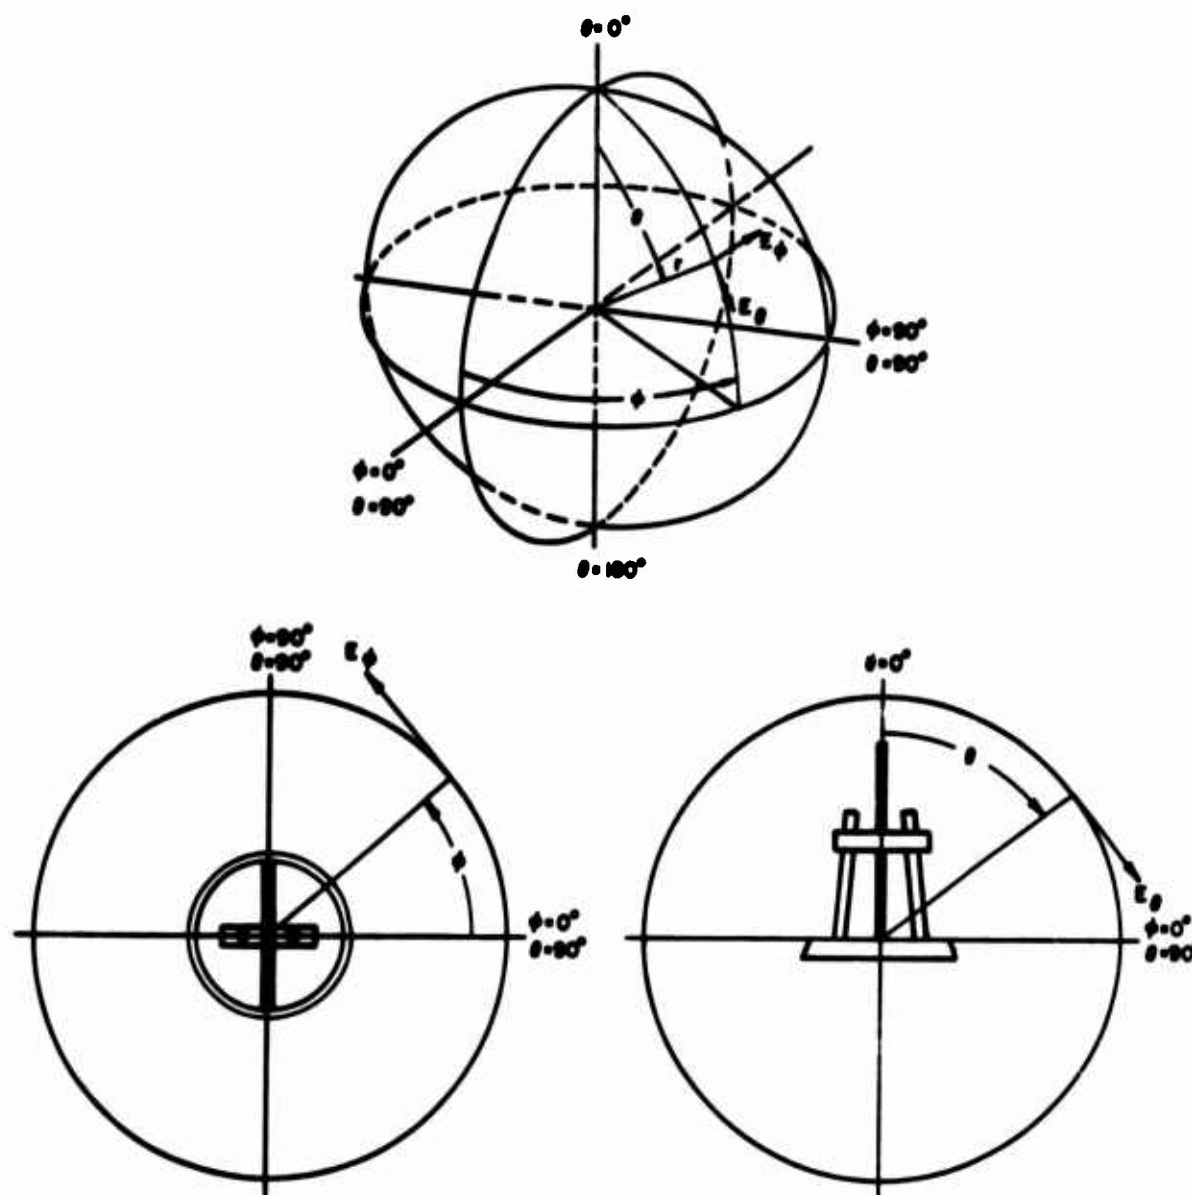



FIG. 4 - MODEL 24.006 ANTENNA COORDINATE SYSTEM

## POLARIZATION

☒ GAIN REF - - - - -  
☒ E $\theta$  - - - - -  
☐ E $\phi$  - - - - -  
☐ R.C. - - - - -  
☐ L.C. - - - - -  
☐ OTHER AS NOTED

$\phi =$  \_\_\_\_\_  $\theta =$  0°  
 COORDINATE REFERENCE

$\phi =$  0°  
 $\theta =$  90°

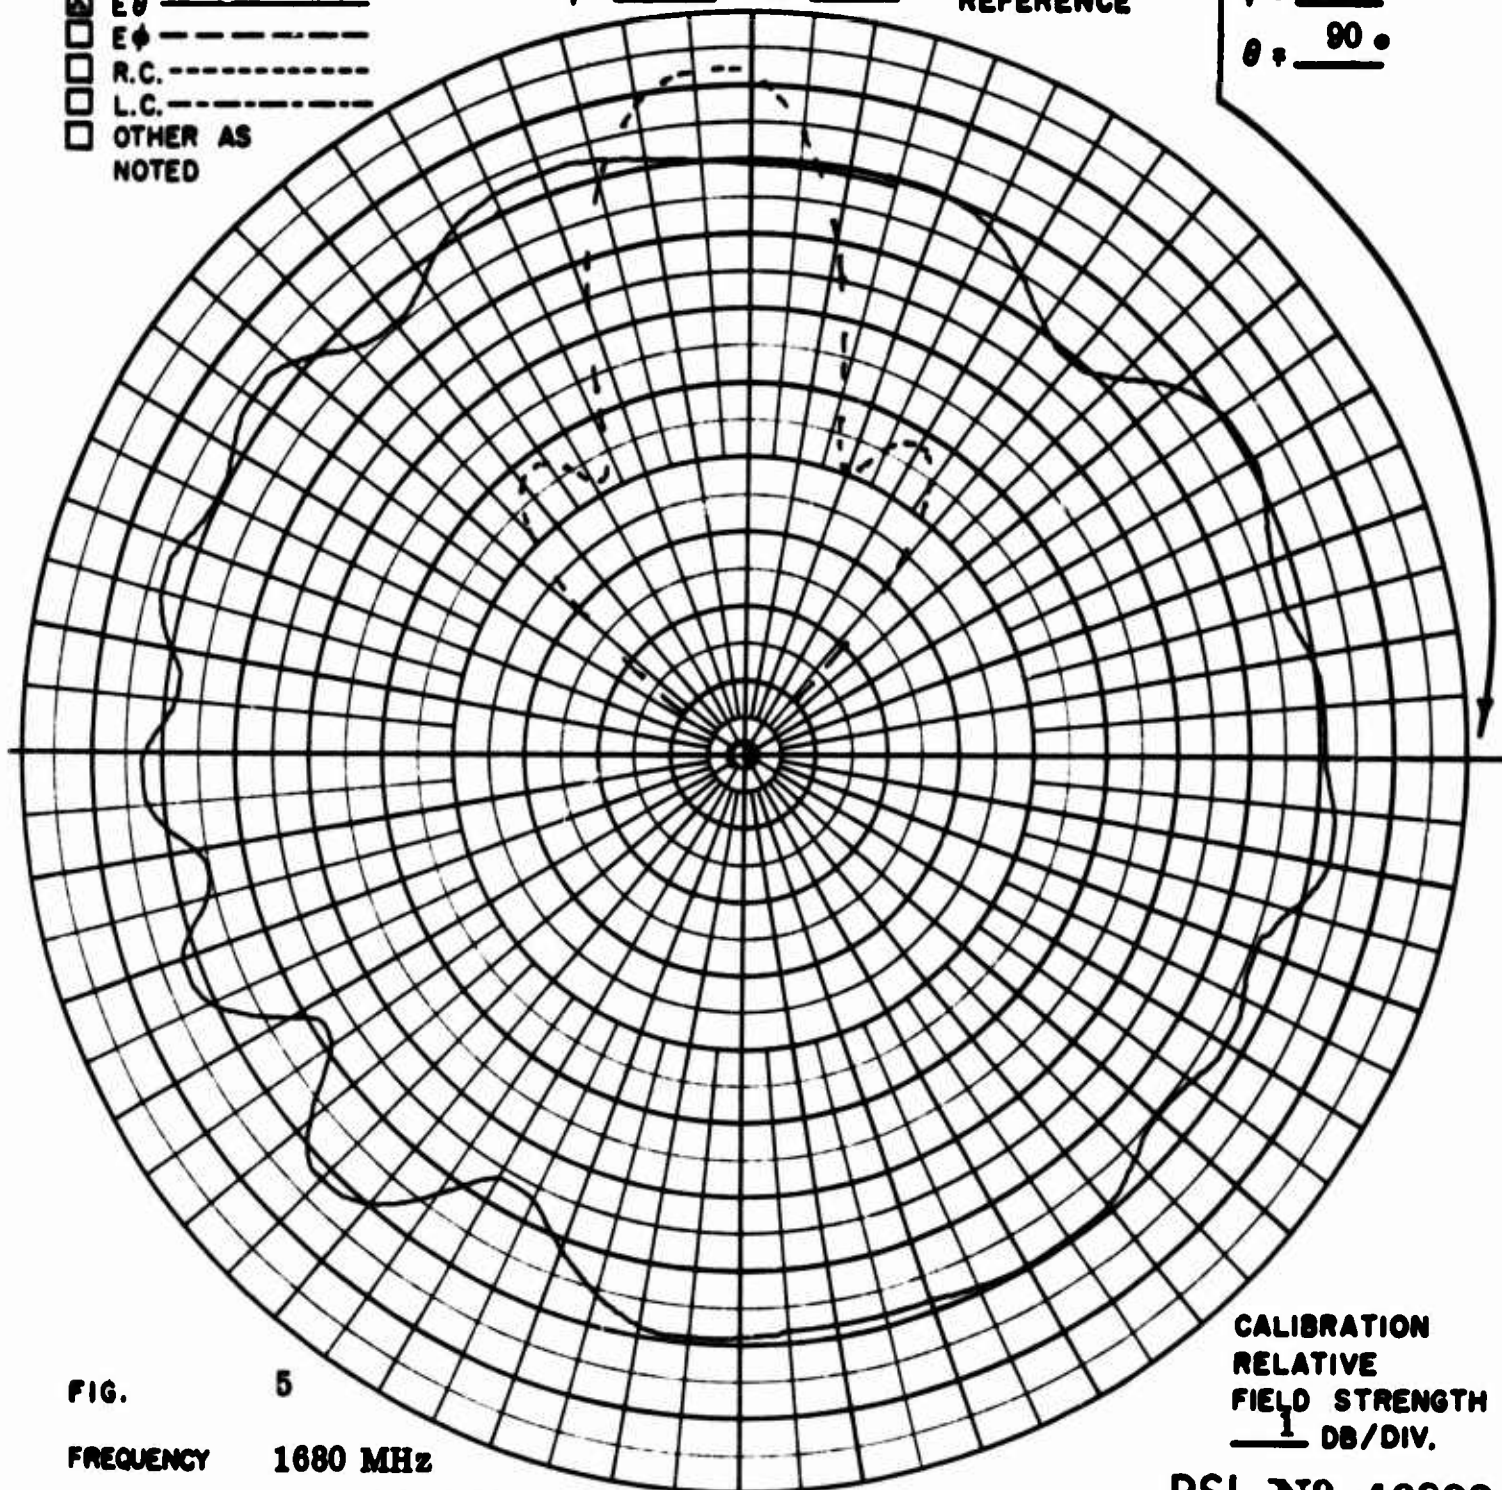

CALIBRATION  
 RELATIVE  
 FIELD STRENGTH  
 1 DB/DIV.

PSL N° 46833

FIG. 5  
 FREQUENCY 1680 MHz  
 ANTENNA Model 24.006 Quadraloop

REMARKS Gain reference is + 17 db standard gain horn. The gain reference pattern is attenuated by 14 db.

## POLARIZATION

- ☐ GAIN REF - - - -  
☒ E $\theta$  - - - -  
☒ E $\phi$  - - - -  
☐ R.C. - - - -  
☐ L.C. - - - -  
☐ OTHER AS NOTED

$\phi = \underline{\hspace{1cm}}$  °     $\theta = \underline{0}$  °    COORDINATE  
 REFERENCE

$\phi = \underline{0}$  °  
 $\theta = \underline{90}$  °

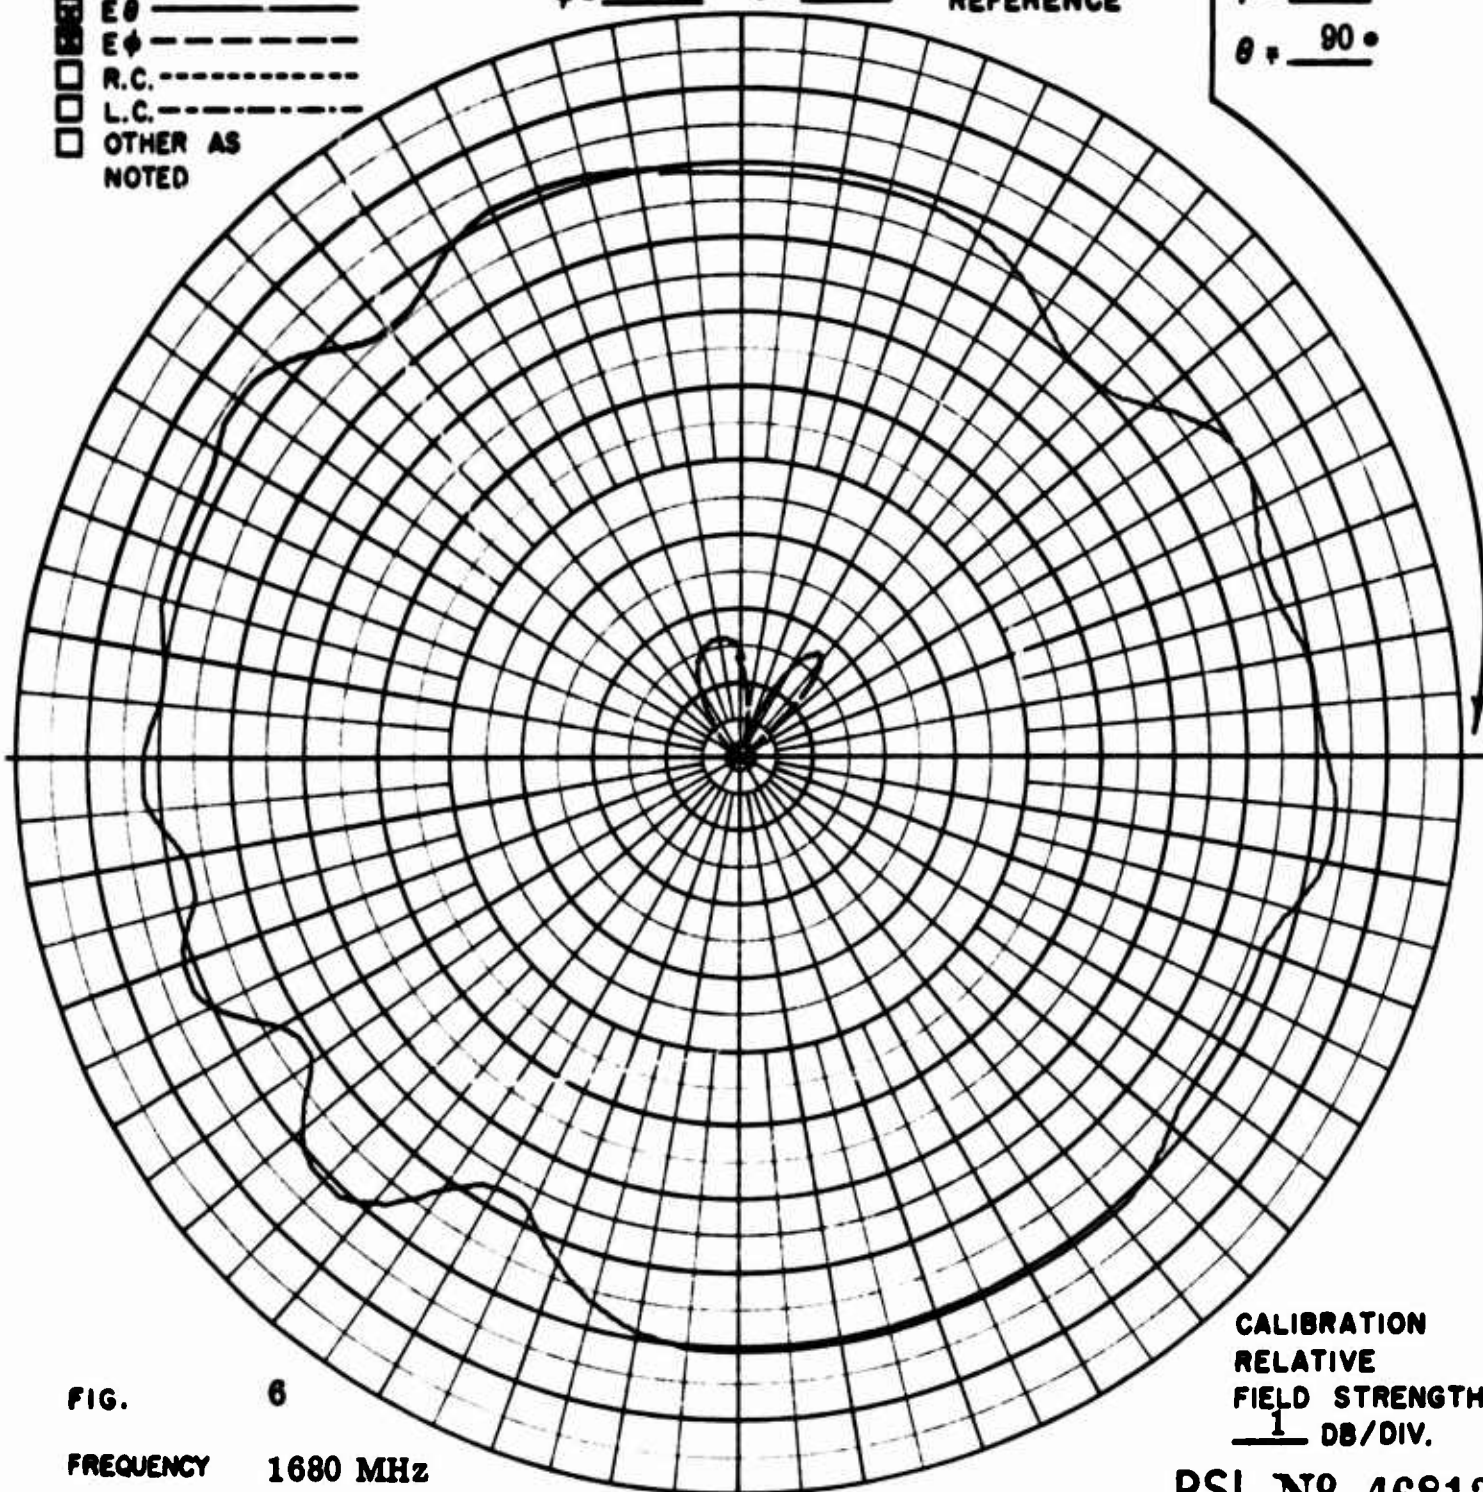


FIG.

6

FREQUENCY 1680 MHz

ANTENNA Model 24.006

REMARKS

CALIBRATION  
 RELATIVE  
 FIELD STRENGTH  
 1 DB/DIV.

PSI N° 46812



## POLARIZATION

- ☐ GAIN REF - - - - -  
☒ E $\theta$  - - - - -  
☒ E $\phi$  - - - - -  
☐ R.C. - - - - -  
☐ L.C. - - - - -  
☐ OTHER AS NOTED

$\phi =$       °     $\theta =$  0 °    COORDINATE  
 REFERENCE

$\phi =$  10 °  
 $\theta =$  90 °

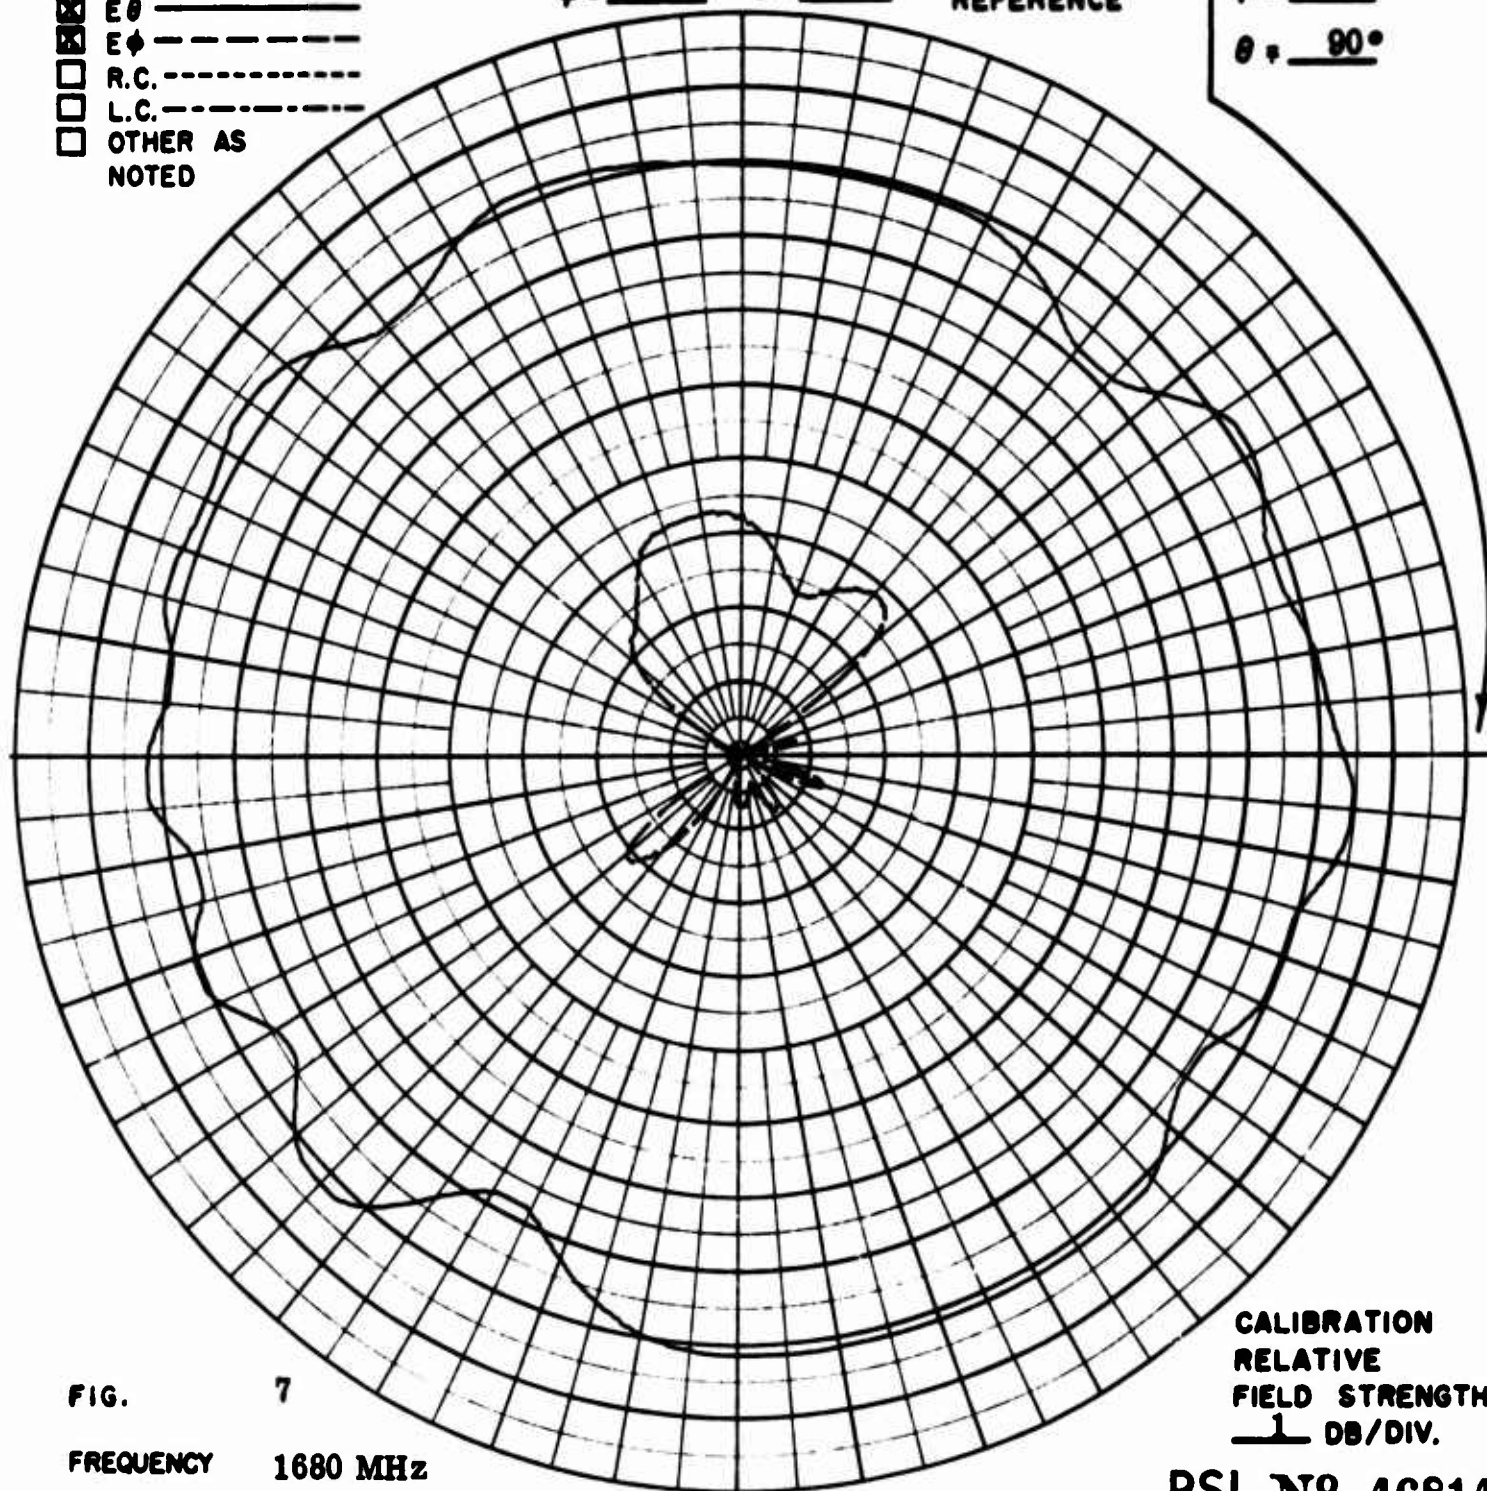


FIG.

7

FREQUENCY 1680 MHz

ANTENNA Model 24.006

REMARKS

CALIBRATION  
 RELATIVE  
 FIELD STRENGTH  
1 DB/DIV.

PSL N° 46814

## POLARIZATION

- ☐ GAIN REF - - - - -  
☒  $E_\theta$  - - - - -  
☒  $E_\phi$  - - - - -  
☐ R.C. - - - - -  
☐ L.C. - - - - -  
☐ OTHER AS NOTED

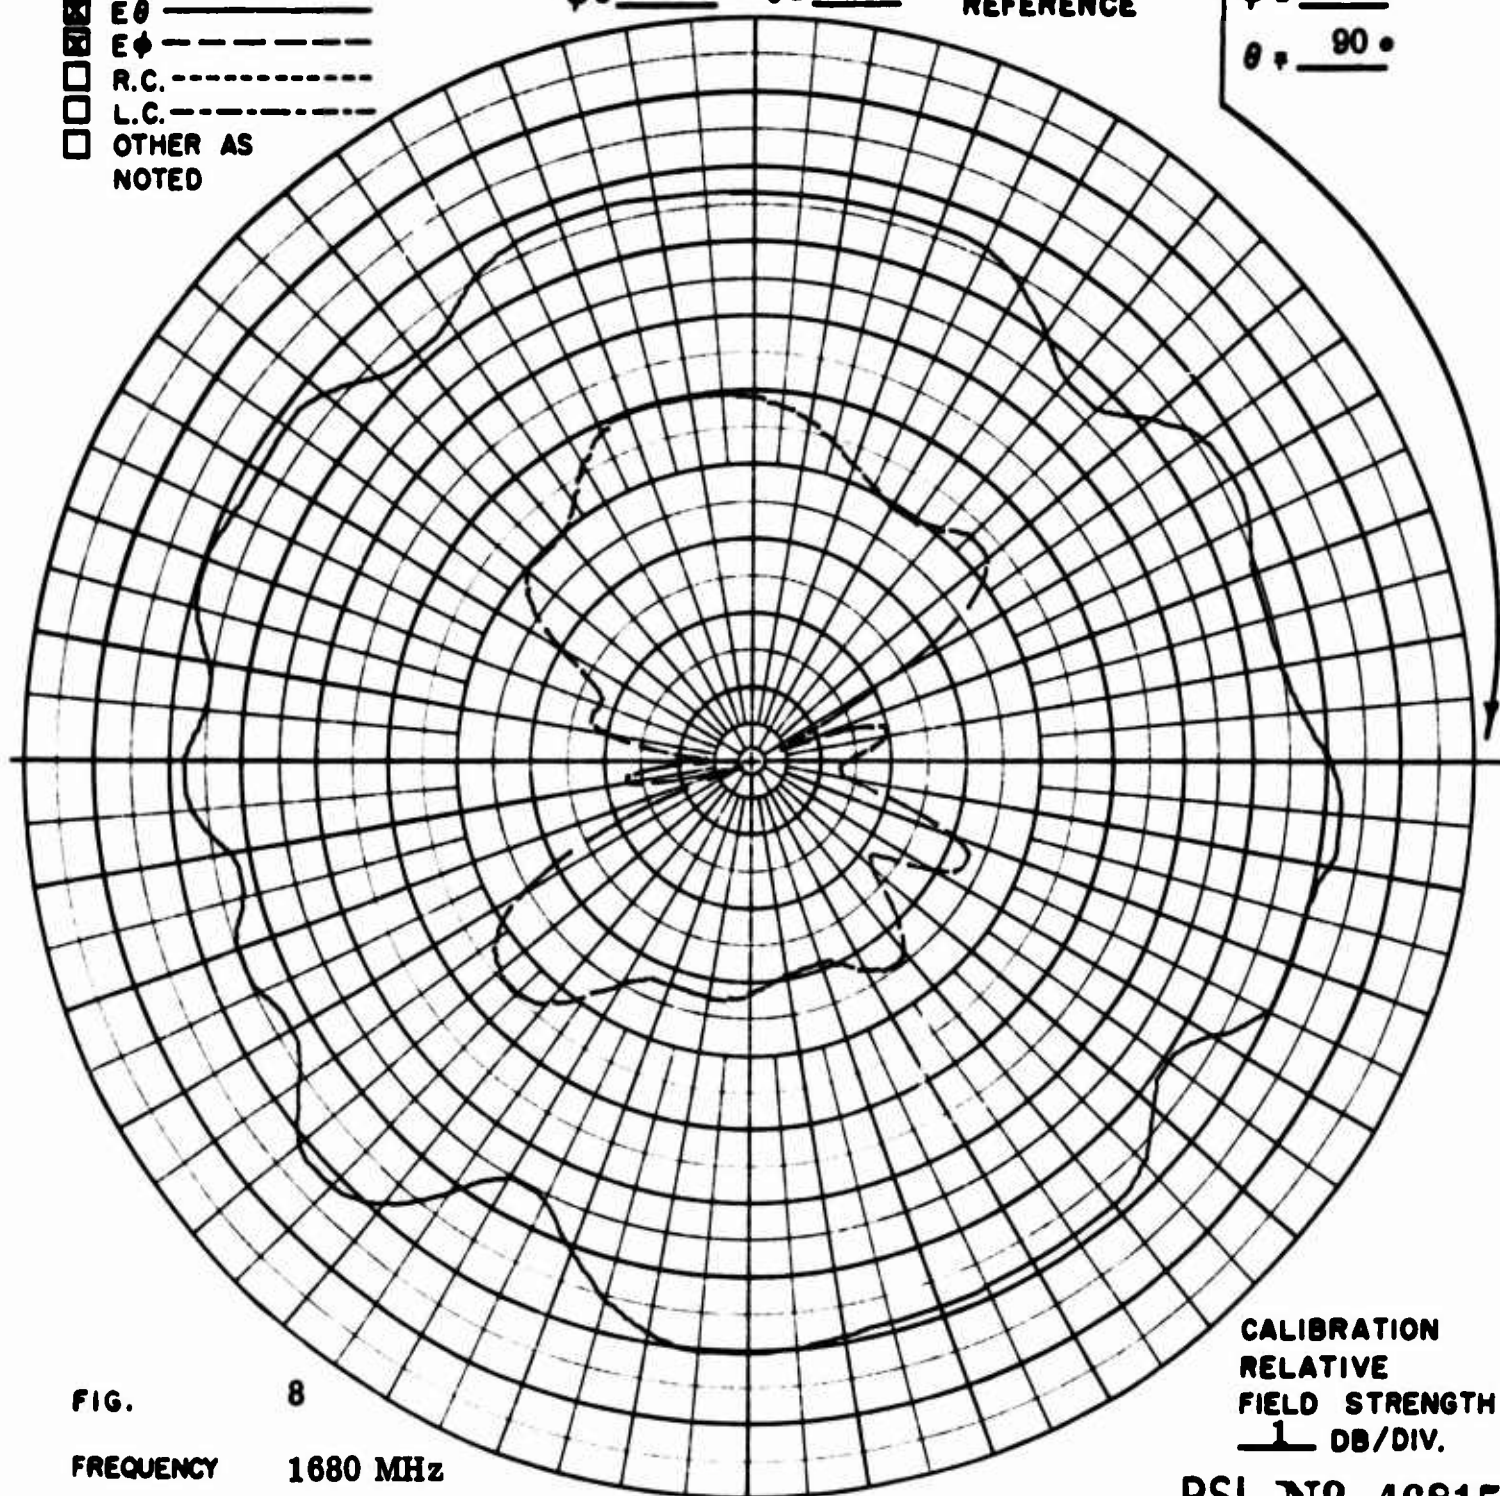
 $\phi = \underline{\hspace{1cm}}^\circ \quad \theta = \underline{0}^\circ$ 
COORDINATE  
REFERENCE
 $\phi = \underline{20}^\circ$   
 $\theta = \underline{90}^\circ$ 


FIG. 8  
 FREQUENCY 1680 MHz  
 ANTENNA Model 24.006  
 REMARKS

CALIBRATION  
 RELATIVE  
 FIELD STRENGTH  
 1 DB/DIV.

PSL N° 46815

## POLARIZATION

- ☐ GAIN REF - - - -  
☒ E $\theta$  - - - -  
☒ E $\phi$  - - - -  
☐ R.C. - - - -  
☐ L.C. - - - -  
☐ OTHER AS NOTED

$\phi =$  \_\_\_\_\_  $\theta =$  0°  
 COORDINATE REFERENCE

$\phi =$  30°  
 $\theta =$  90°

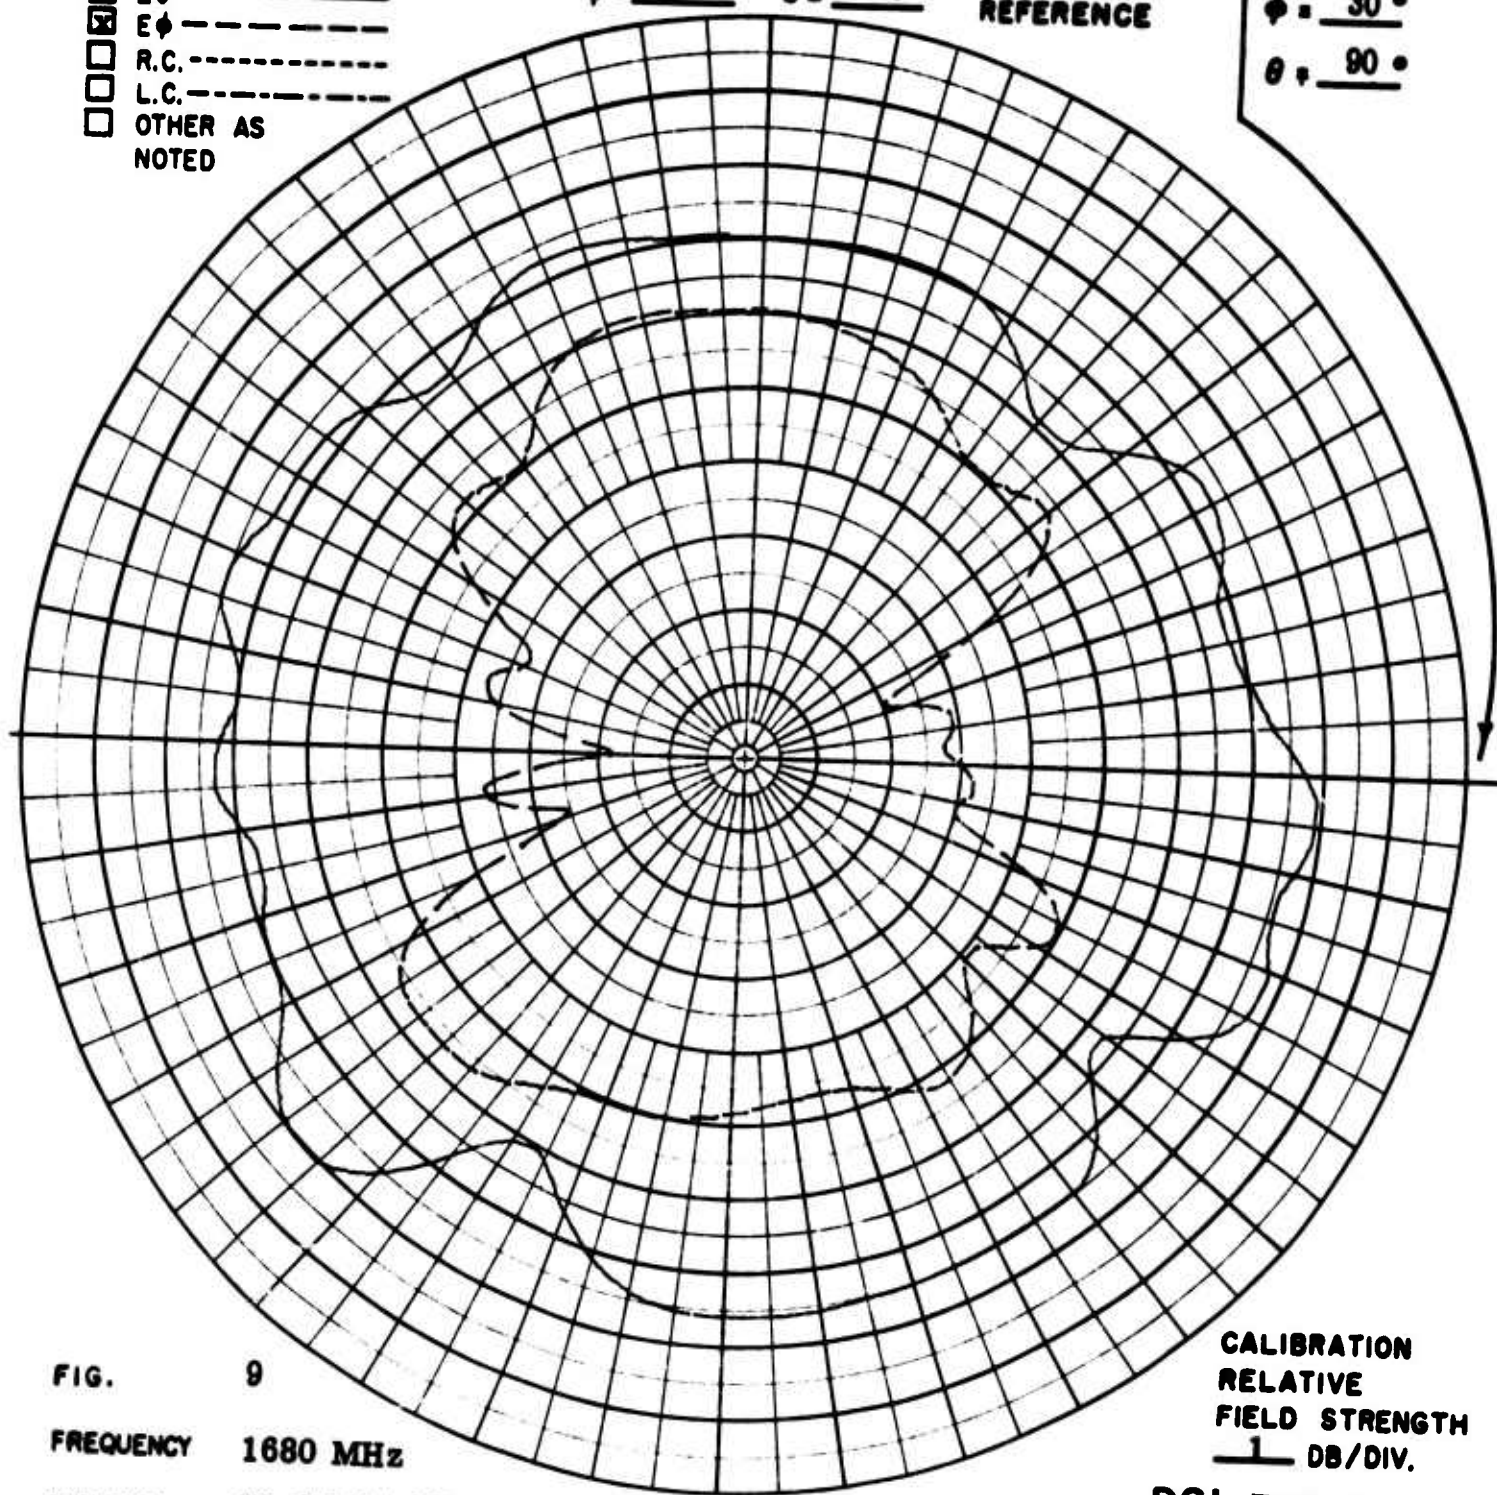


FIG. 9  
 FREQUENCY 1680 MHz  
 ANTENNA Model 24.006  
 REMARKS

CALIBRATION  
 RELATIVE  
 FIELD STRENGTH  
 1 DB/DIV.

PSL N° 46816



## POLARIZATION

- ☐ GAIN REF - - - -  
☒  $E\theta$  - - - -  
☒  $E\phi$  - - - -  
☐ R.C. - - - -  
☐ L.C. - - - -  
☐ OTHER AS NOTED

$\phi = \underline{\hspace{1cm}}$  °     $\theta = \underline{0}$  °    COORDINATE  
 REFERENCE

$\phi = \underline{40}$  °  
 $\theta = \underline{90}$  °

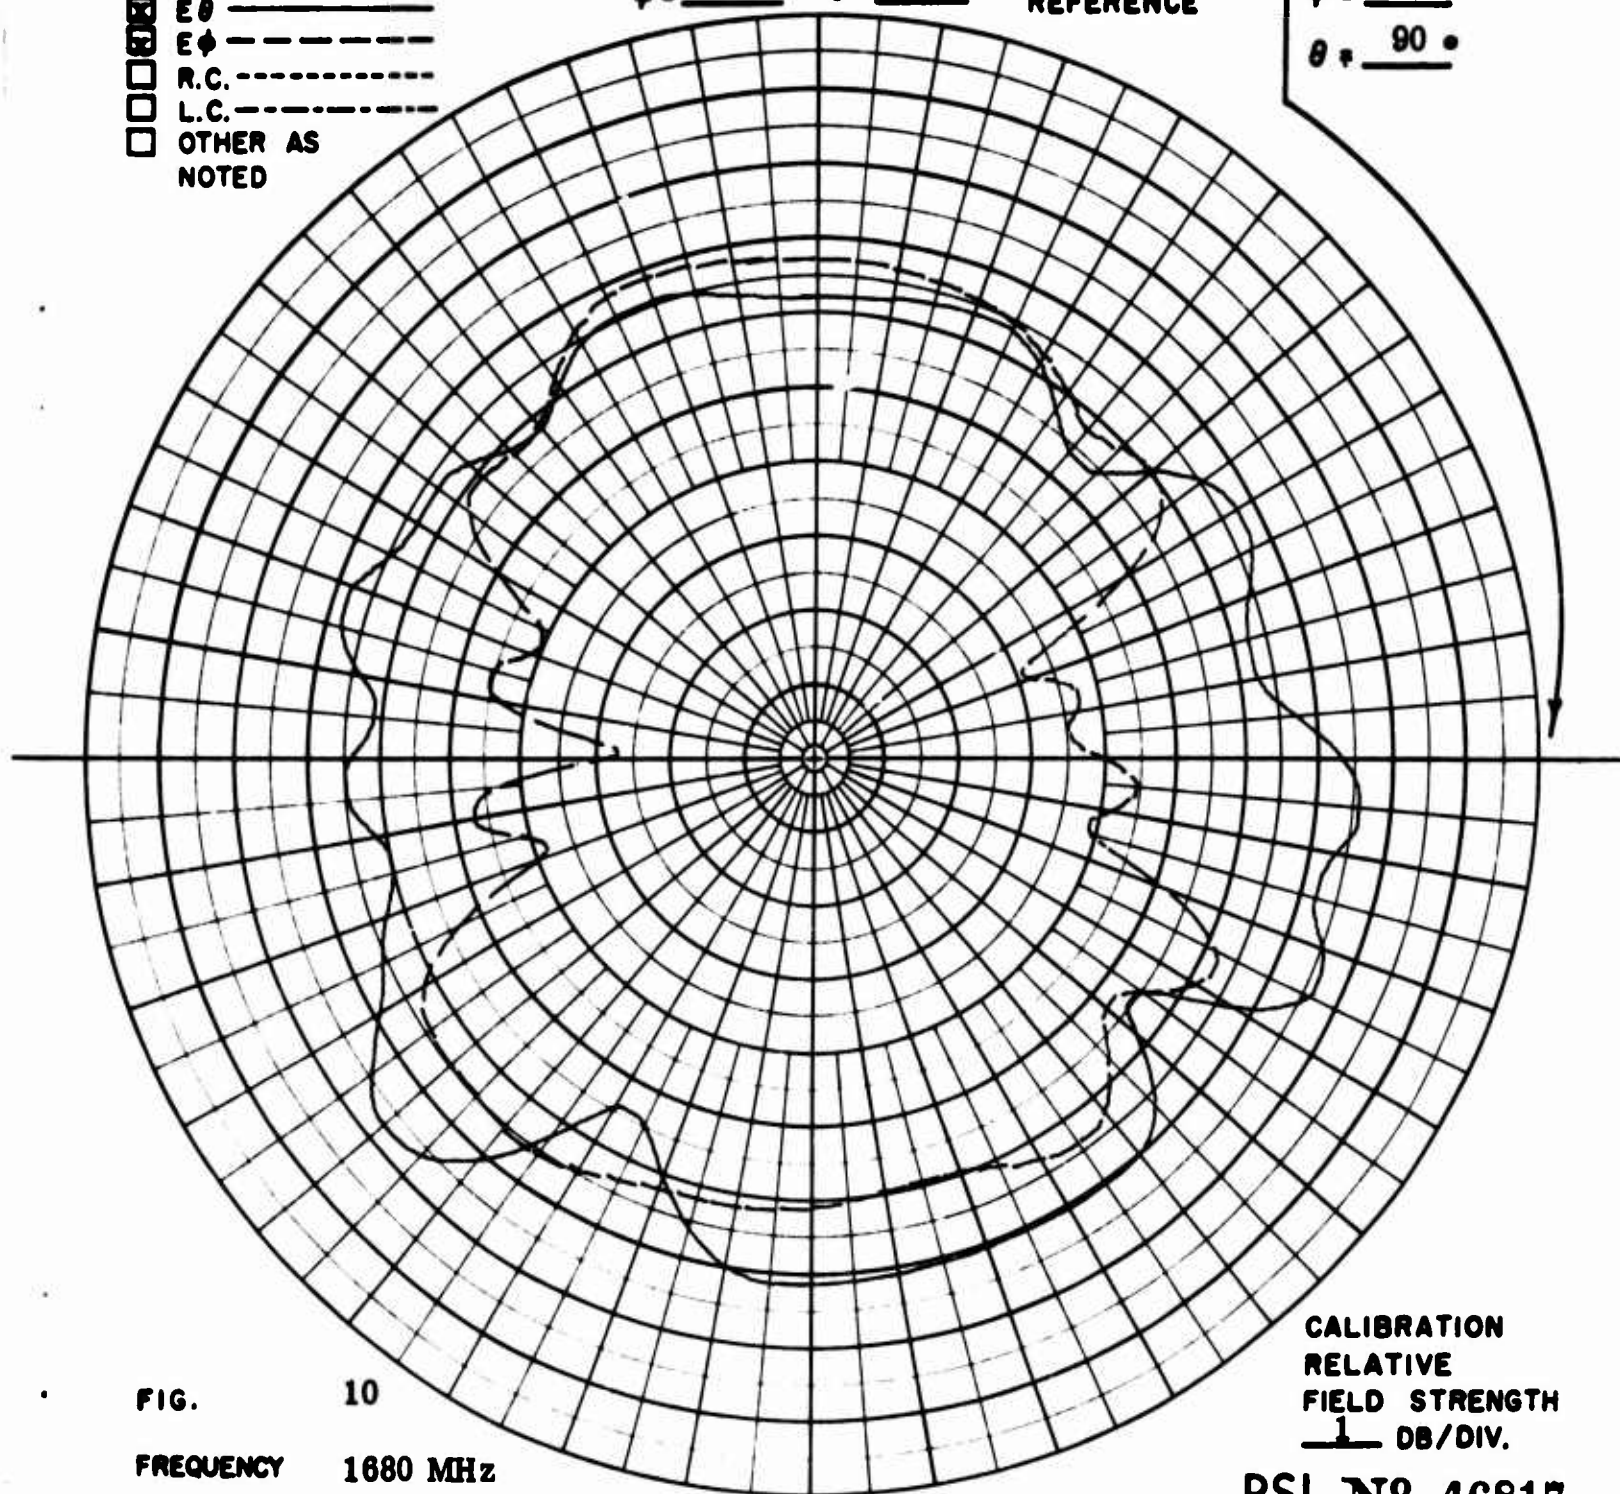


FIG. 10

FREQUENCY 1680 MHz

ANTENNA Model 24.006

REMARKS

CALIBRATION  
 RELATIVE  
 FIELD STRENGTH  
 1 DB/DIV.

PSL N° 46817

## POLARIZATION

- ☐ GAIN REF - - - -  
☒ E  $\theta$  - - - -  
☒ E  $\phi$  - - - -  
☐ R.C. - - - -  
☐ L.C. - - - -  
☐ OTHER AS NOTED

$\phi =$  \_\_\_\_\_  $\theta =$  0°  
 COORDINATE  
 REFERENCE

$\phi =$  50°  
 $\theta =$  90°

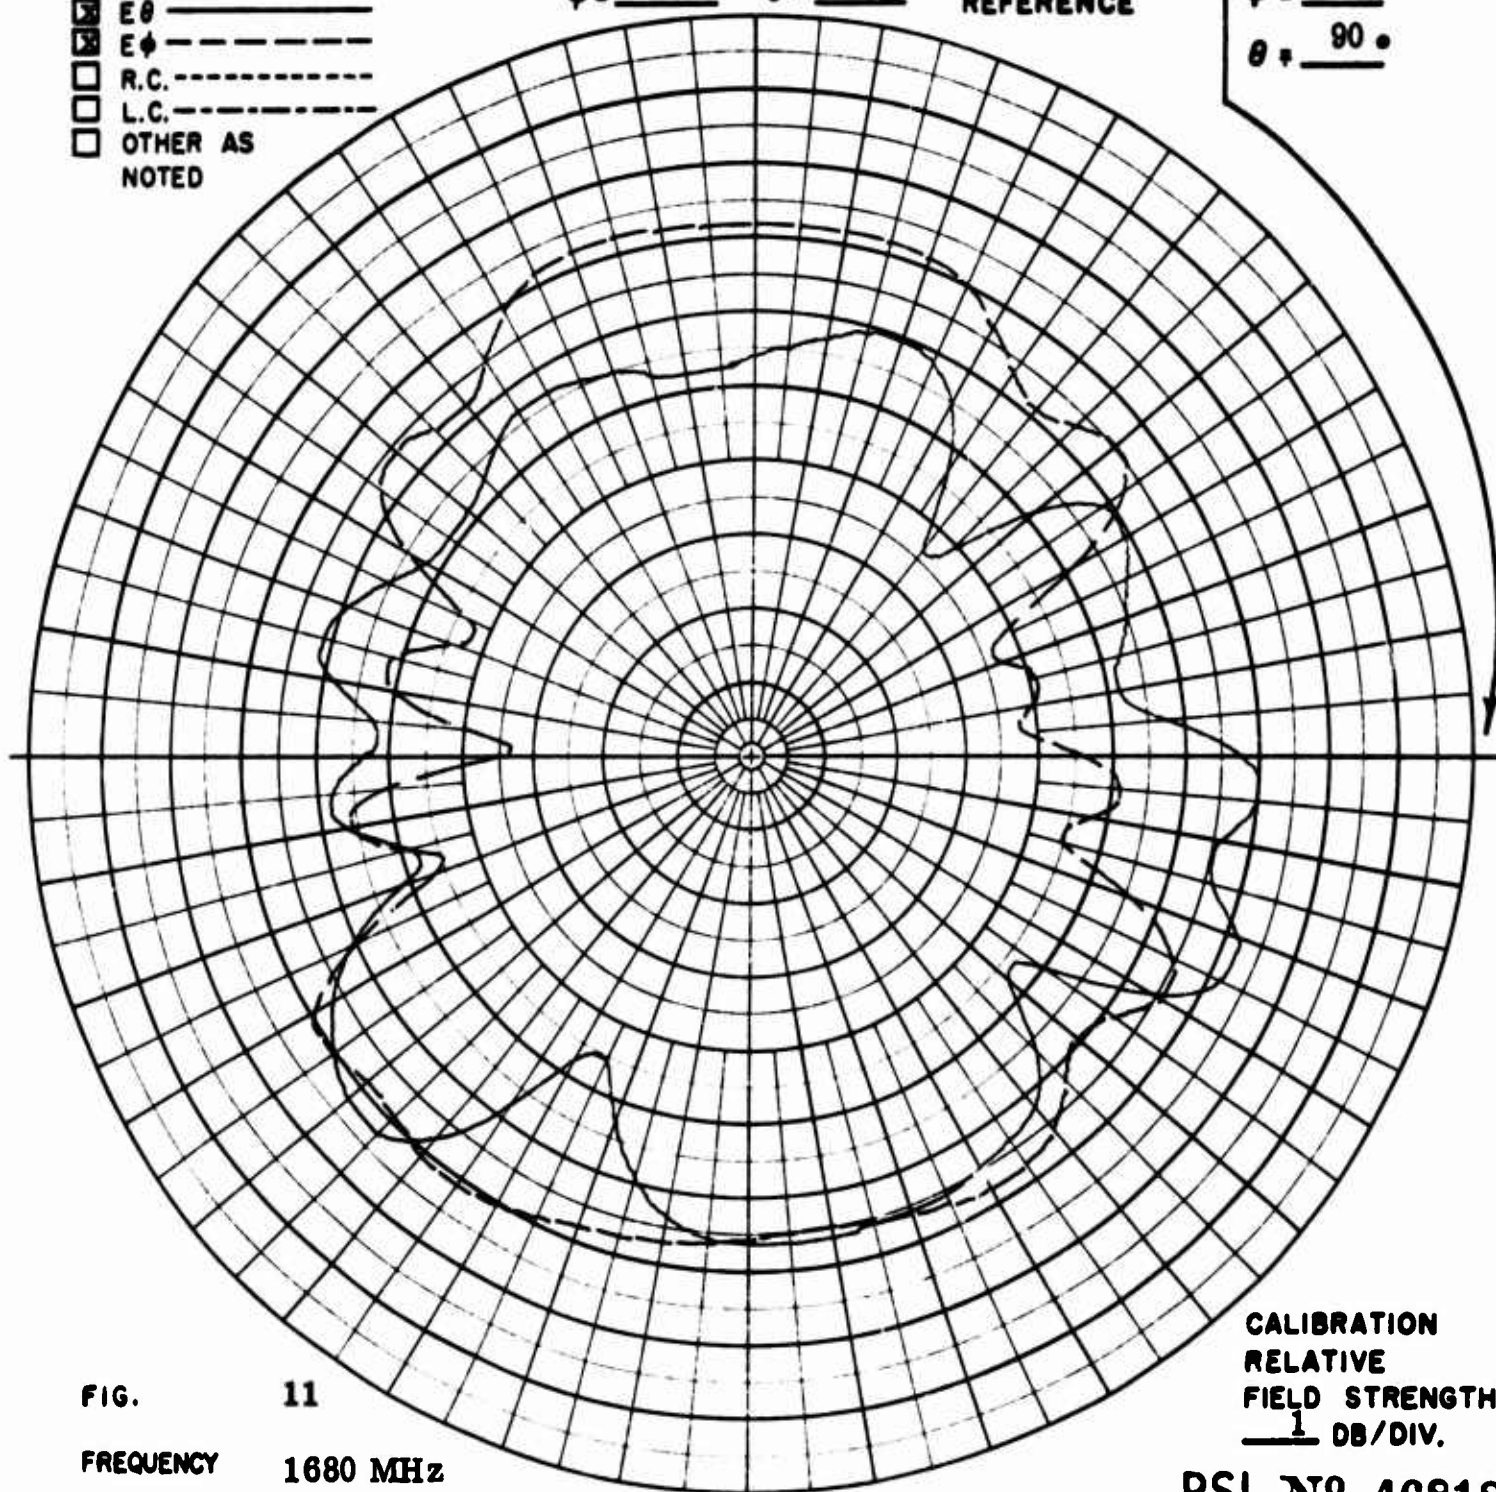


FIG.

11

FREQUENCY

1680 MHz

ANTENNA

Model 24.006

REMARKS

CALIBRATION  
 RELATIVE  
 FIELD STRENGTH  
 1 DB/DIV.

PSL N° 46818

## POLARIZATION

- ☐ GAIN REF - - - -  
☒ E $\theta$  - - - -  
☒ E $\phi$  - - - -  
☐ R.C. - - - -  
☐ L.C. - - - -  
☐ OTHER AS NOTED

$\phi =$      °     $\theta =$  0°    COORDINATE  
 REFERENCE

$\phi =$  60°  
 $\theta =$  90°

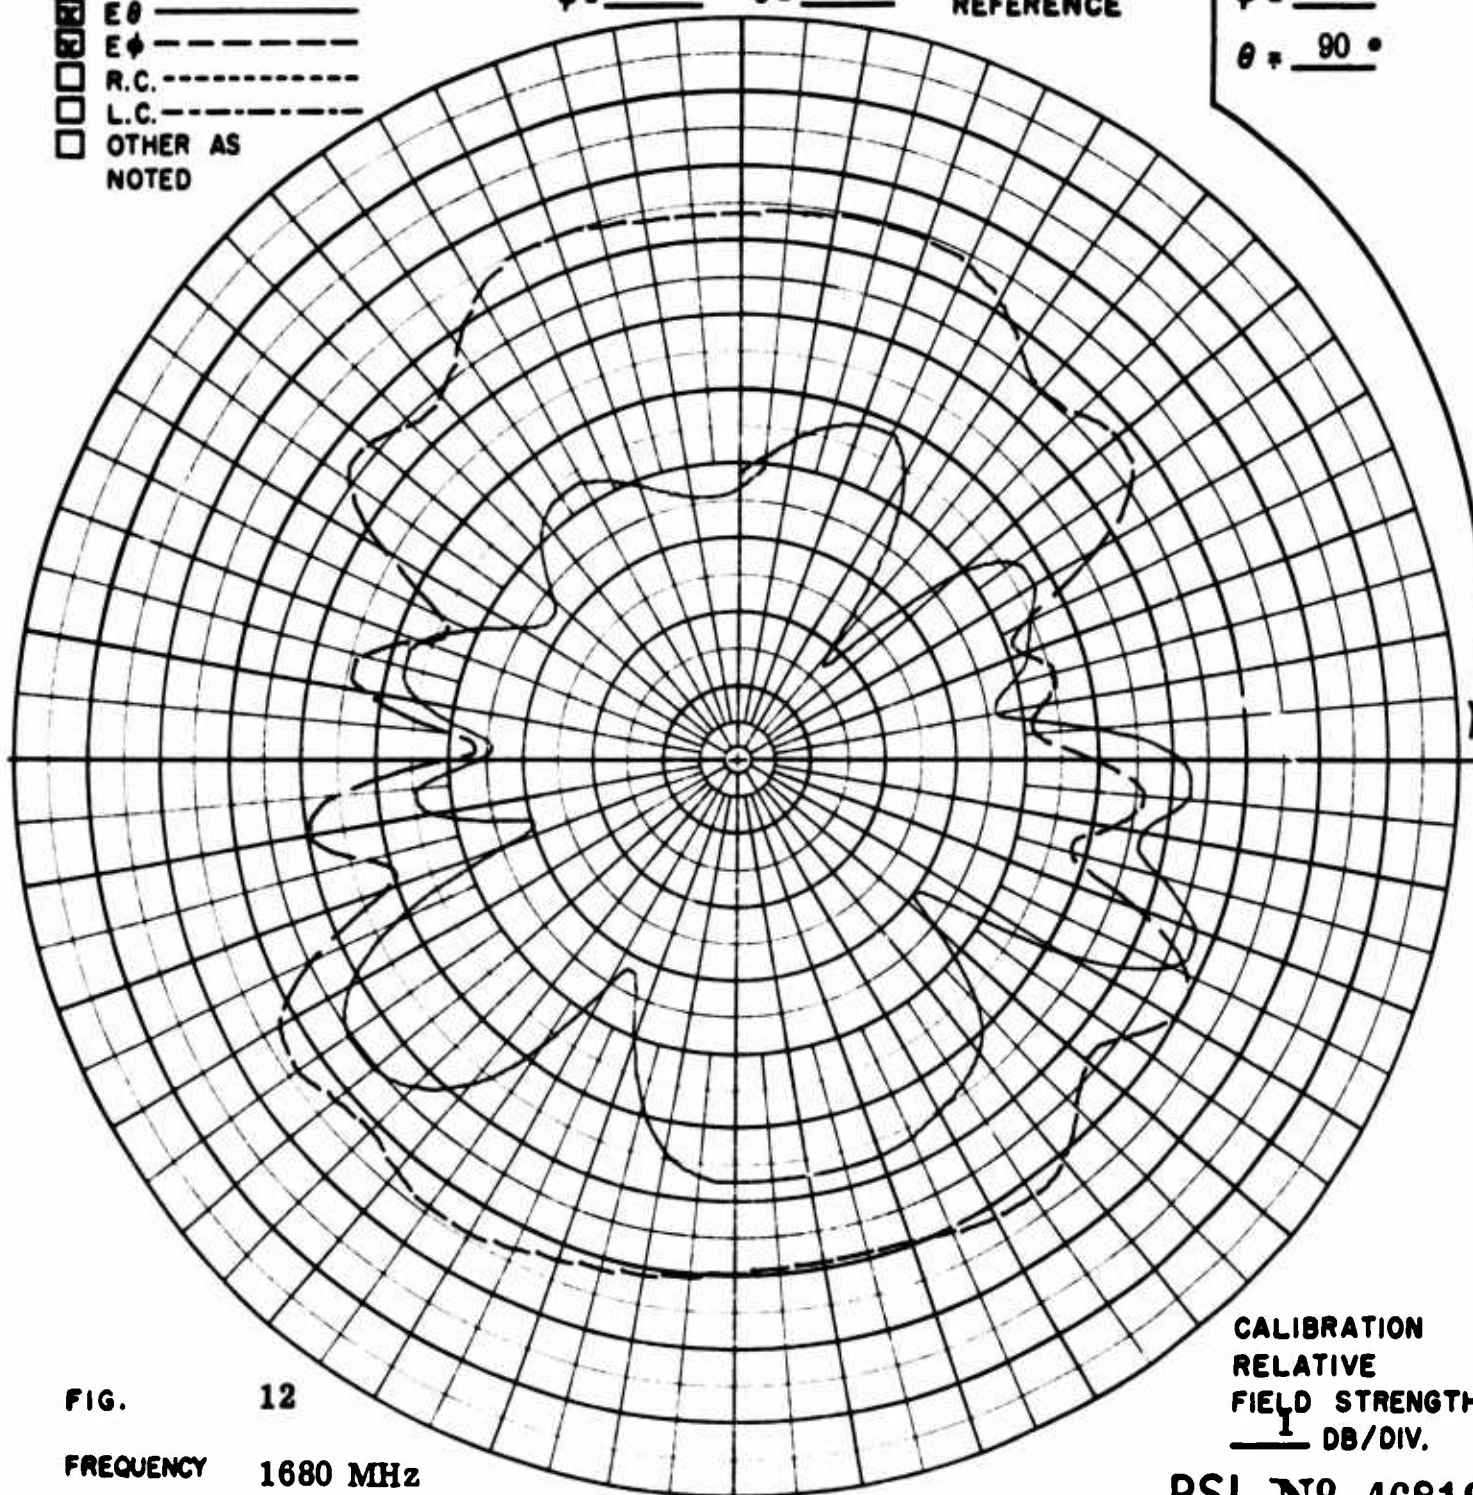


FIG. 12  
 FREQUENCY 1680 MHz  
 ANTENNA Model 24.006  
 REMARKS

CALIBRATION  
 RELATIVE  
 FIELD STRENGTH  
1 DB/DIV.

PSL N° 46819



## POLARIZATION

- ☐ GAIN REF - - - - -  
☒ E  $\theta$  - - - - -  
☒ E  $\phi$  - - - - -  
☐ R.C. - - - - -  
☐ L.C. - - - - -  
☐ OTHER AS NOTED

$\phi =$  \_\_\_\_\_  $\theta =$  0°  
 COORDINATE REFERENCE

$\phi =$  70°  
 $\theta =$  90°

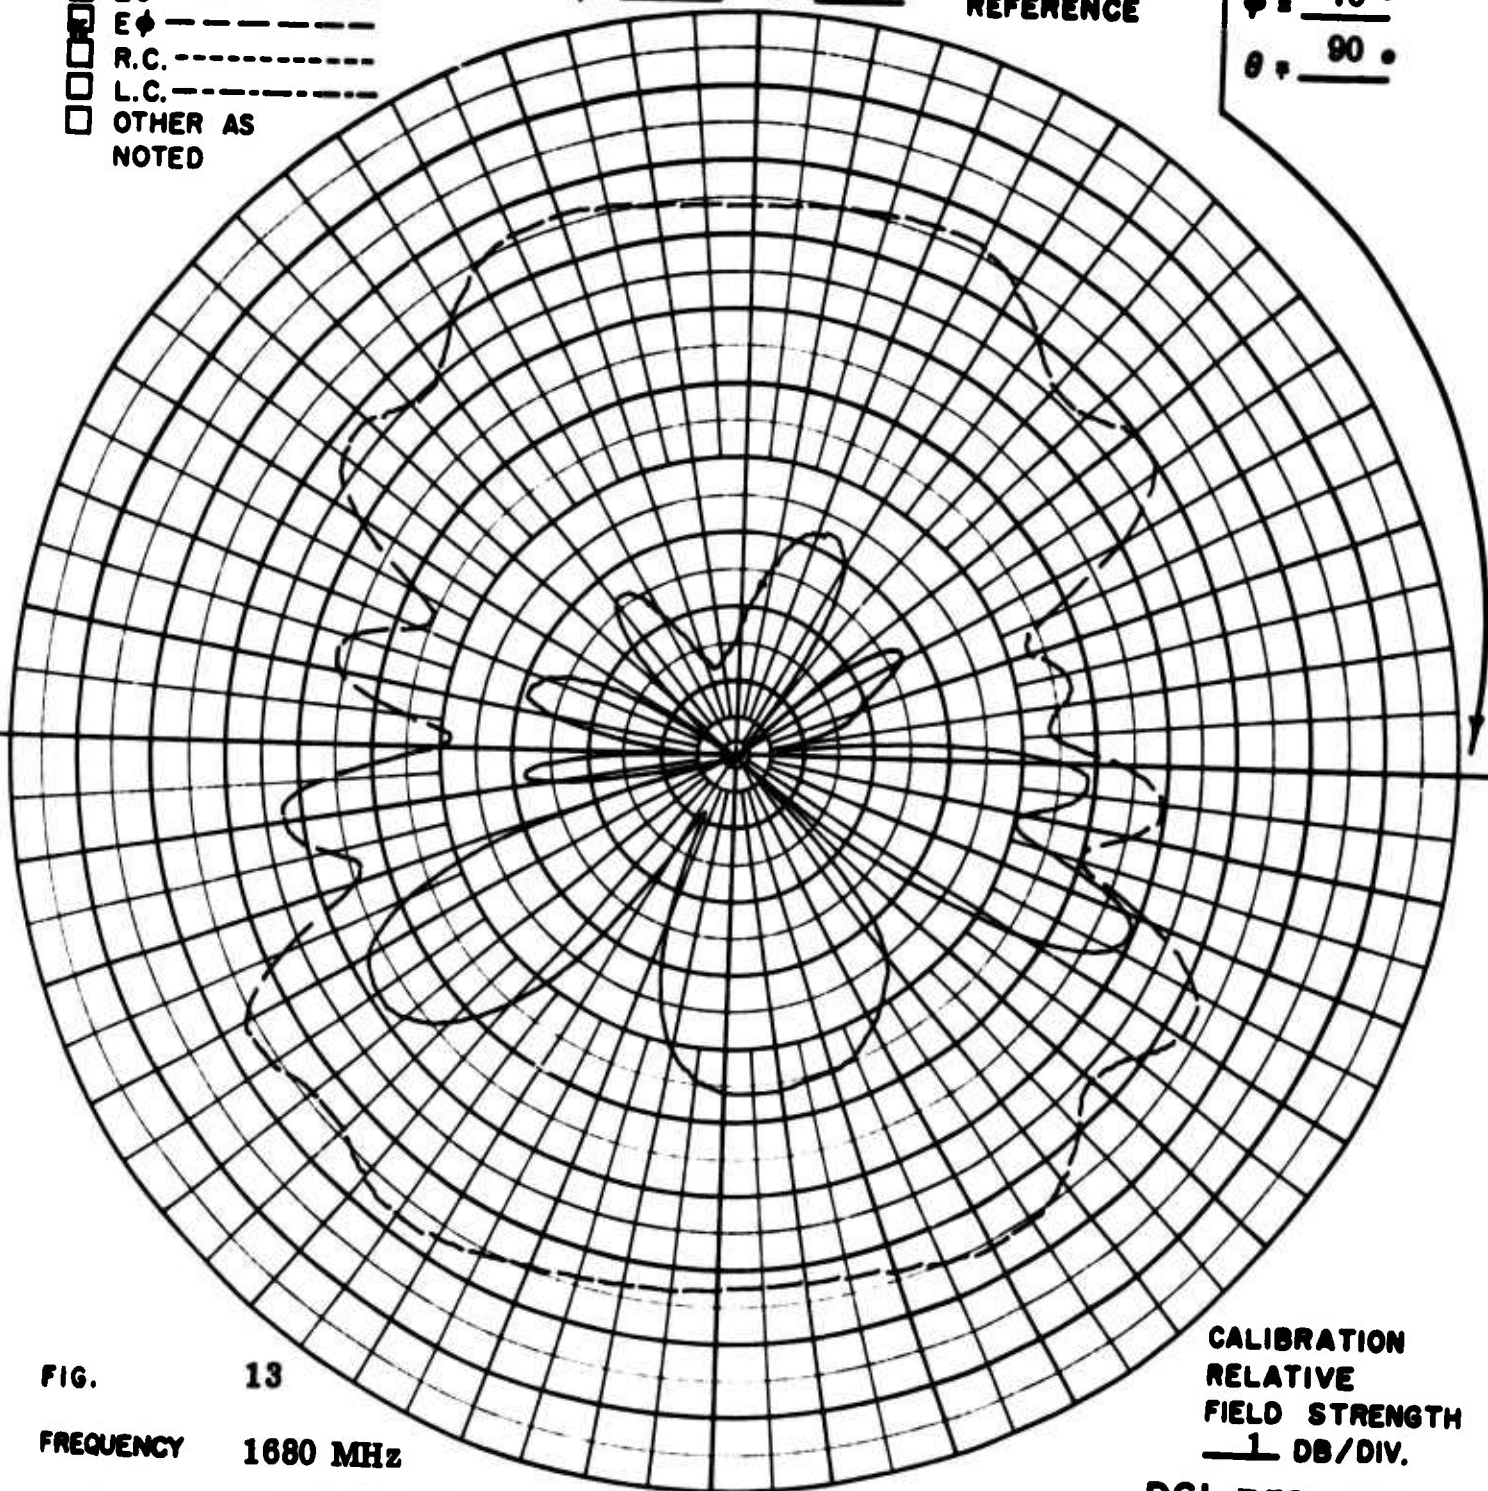


FIG. 13  
 FREQUENCY 1680 MHz  
 ANTENNA Model 24.006  
 REMARKS

CALIBRATION  
 RELATIVE  
 FIELD STRENGTH  
 1 DB/DIV.

PSL N° 46820

## POLARIZATION

- ☐ GAIN REF - - - - -  
☒ E $\theta$  - - - - -  
☒ E $\phi$  - - - - -  
☐ R.C. - - - - -  
☐ L.C. - - - - -  
☐ OTHER AS NOTED

$\phi = \underline{\hspace{1cm}}$      $\theta = \underline{0^\circ}$     COORDINATE  
 REFERENCE

$\phi = \underline{80^\circ}$   
 $\theta = \underline{90^\circ}$

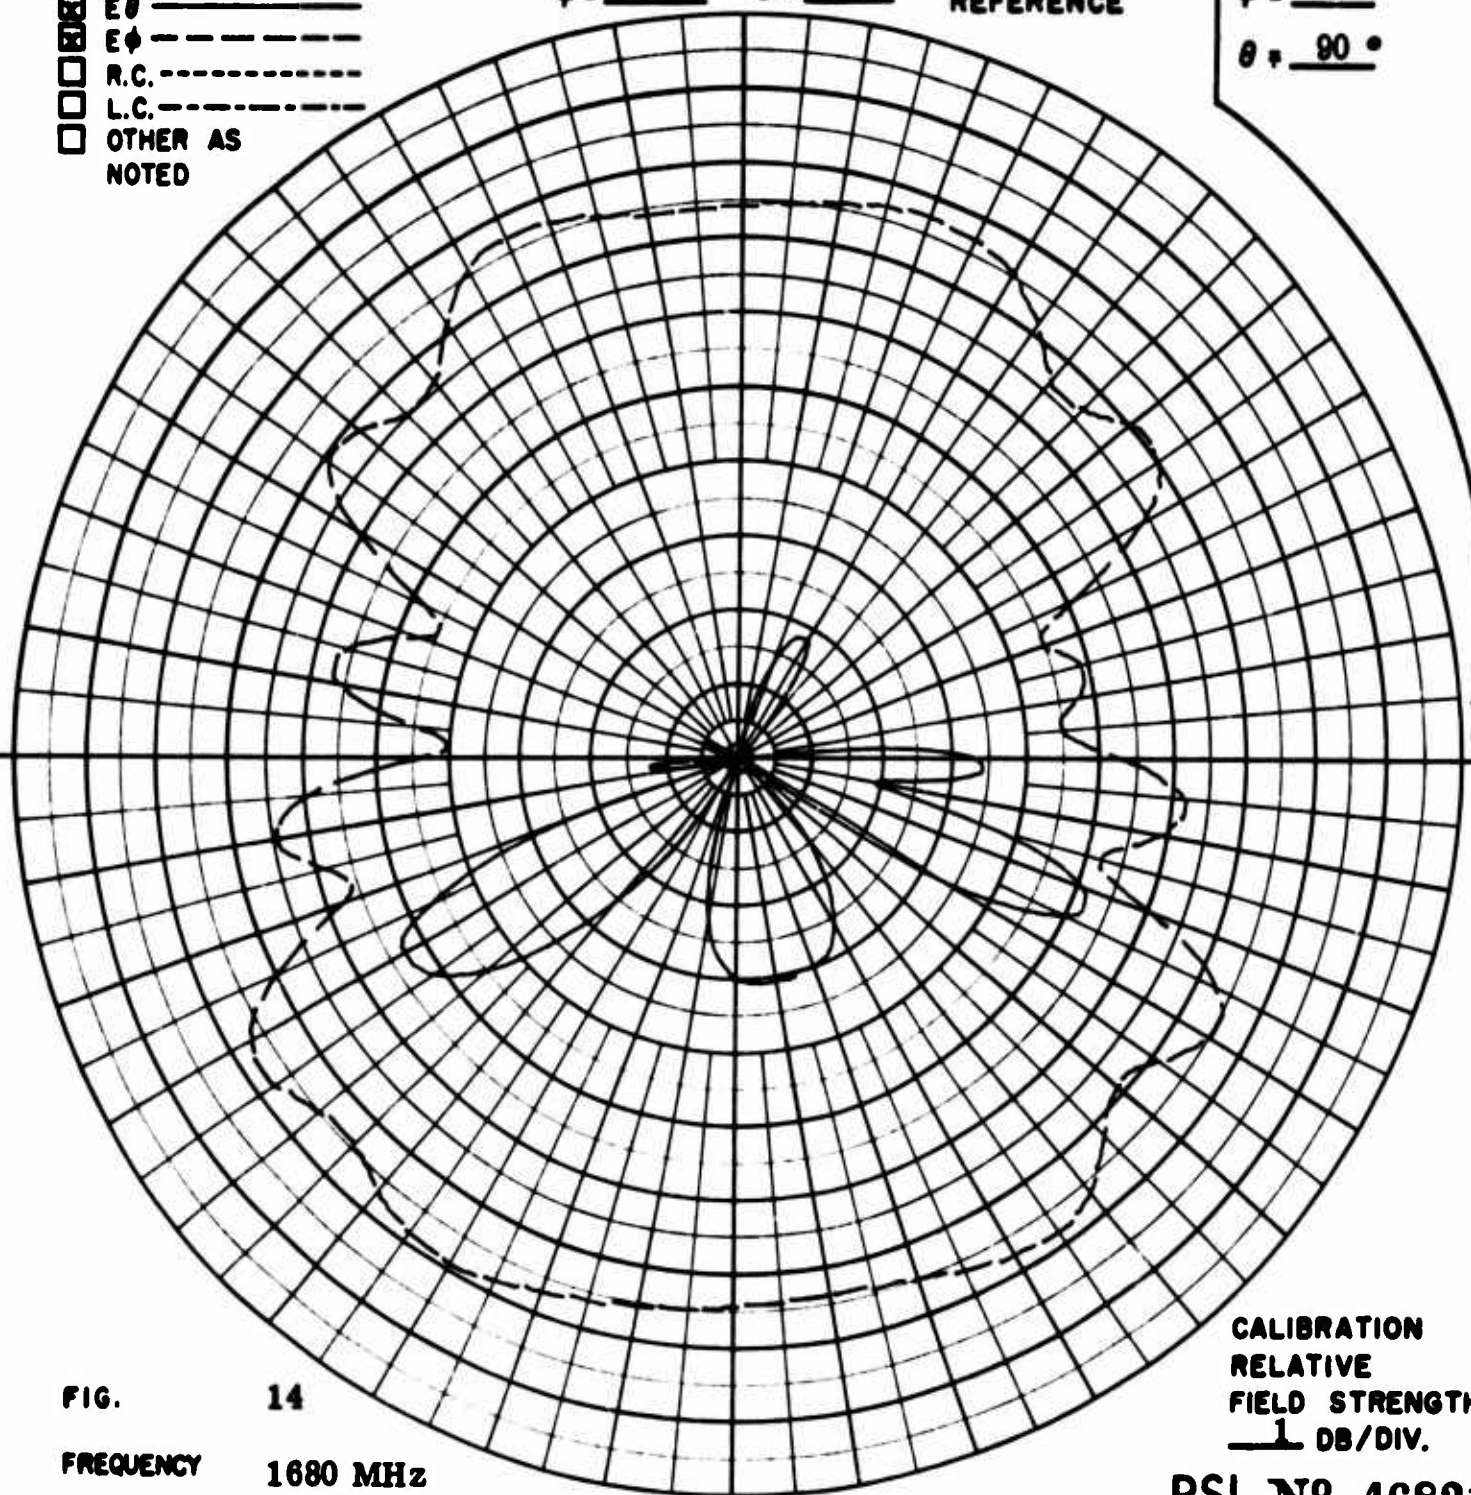


FIG. 14  
 FREQUENCY 1680 MHz  
 ANTENNA Model 24.006  
 REMARKS

CALIBRATION  
 RELATIVE  
 FIELD STRENGTH  
 1 DB/DIV.

PSL N° 46821

## POLARIZATION

- ☐ GAIN REF -----  
☒ E $\theta$  -----  
☒ E $\phi$  -----  
☐ R.C. -----  
☐ L.C. -----  
☐ OTHER AS NOTED

$\phi = \underline{\hspace{1cm}}^\circ$      $\theta = \underline{0}^\circ$     COORDINATE  
 REFERENCE

$\phi = \underline{90}^\circ$   
 $\theta = \underline{90}^\circ$

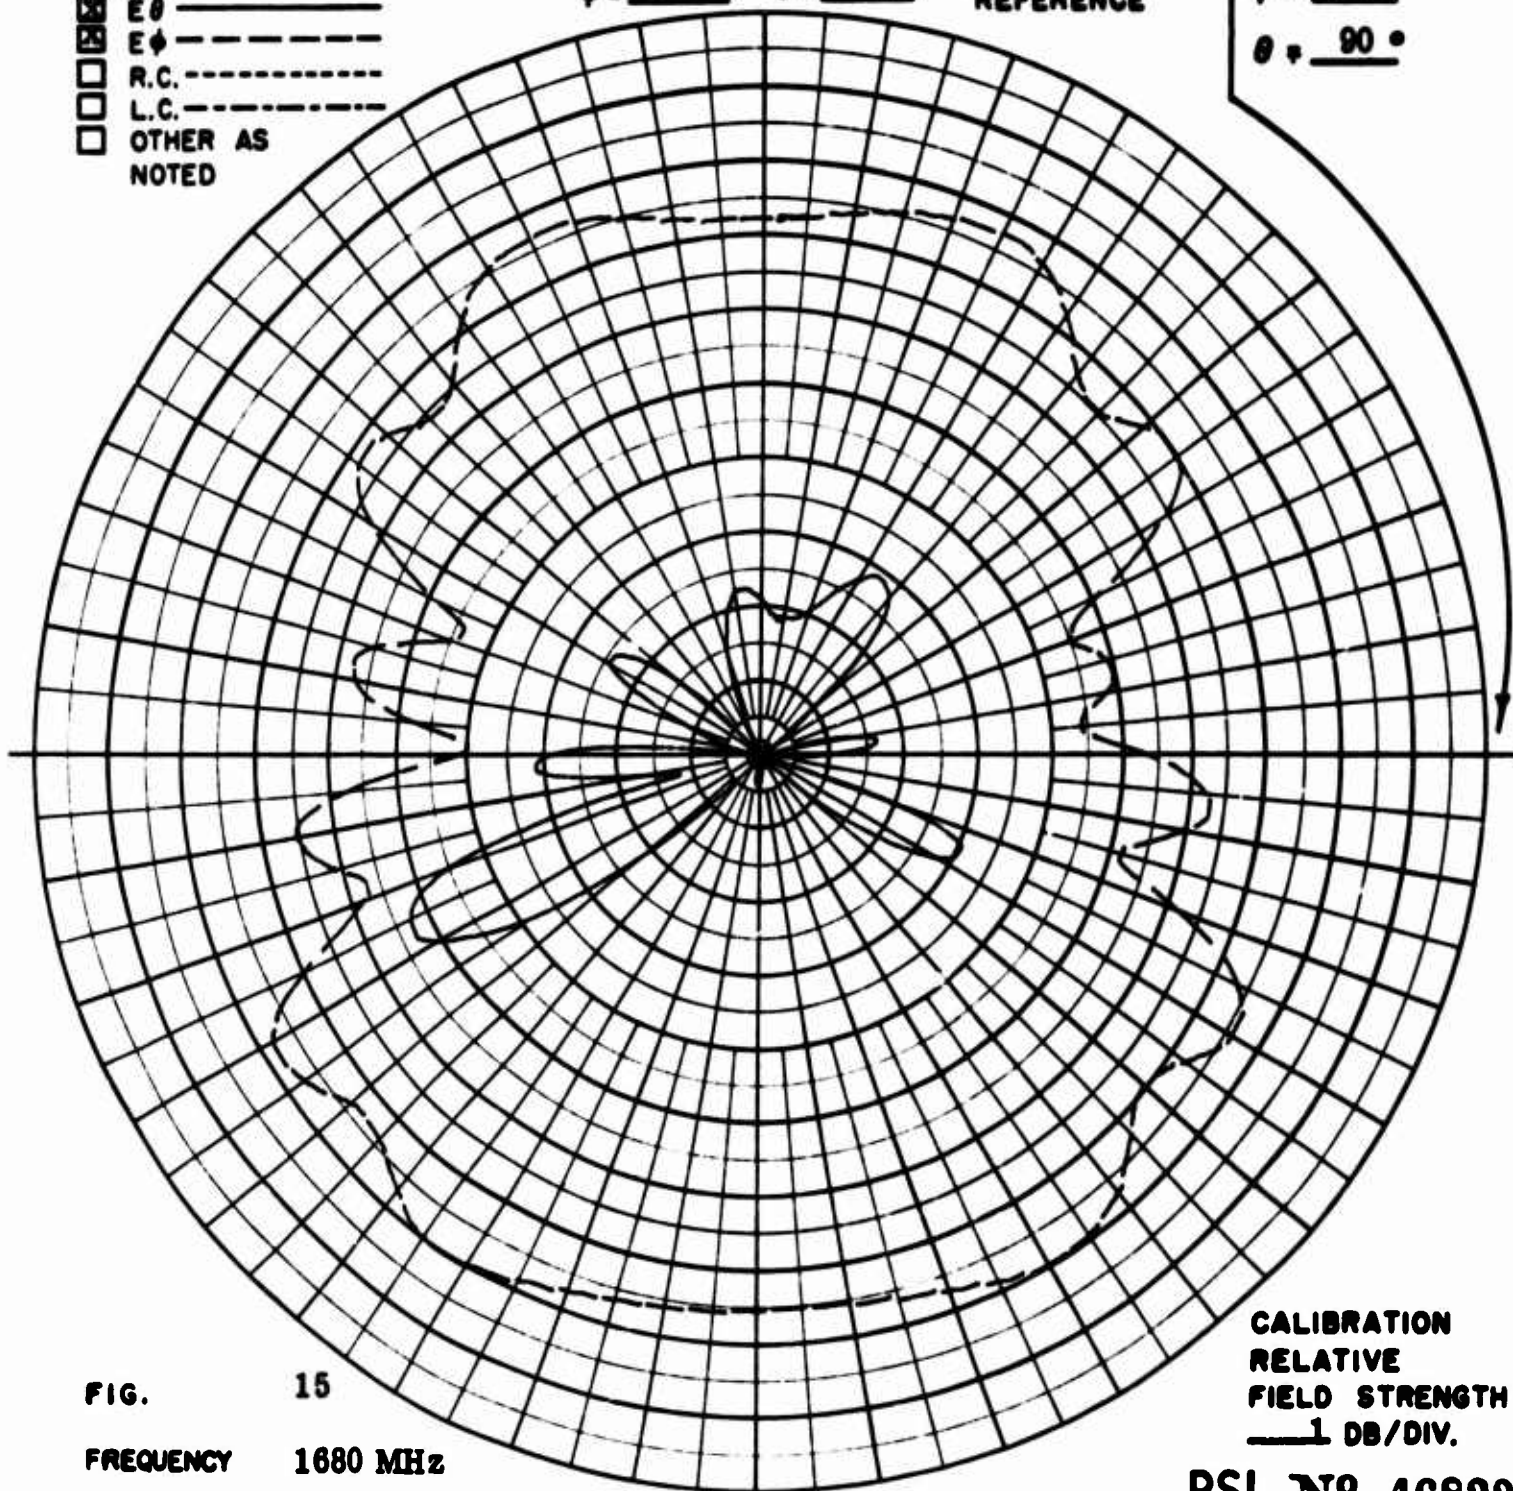


FIG. 15  
 FREQUENCY 1680 MHz  
 ANTENNA Model 24.006  
 REMARKS

CALIBRATION  
 RELATIVE  
 FIELD STRENGTH  
 1 DB/DIV.

PSL N° 46822



## POLARIZATION

- ☐ GAIN REF - - - - -  
☒ E $\theta$  - - - - -  
☒ E $\phi$  - - - - -  
☐ R.C. - - - - -  
☐ L.C. - - - - -  
☐ OTHER AS NOTED

$\phi =$  \_\_\_\_\_  $\theta =$  0° COORDINATE  
 REFERENCE

$\phi =$  100°  
 $\theta =$  90°

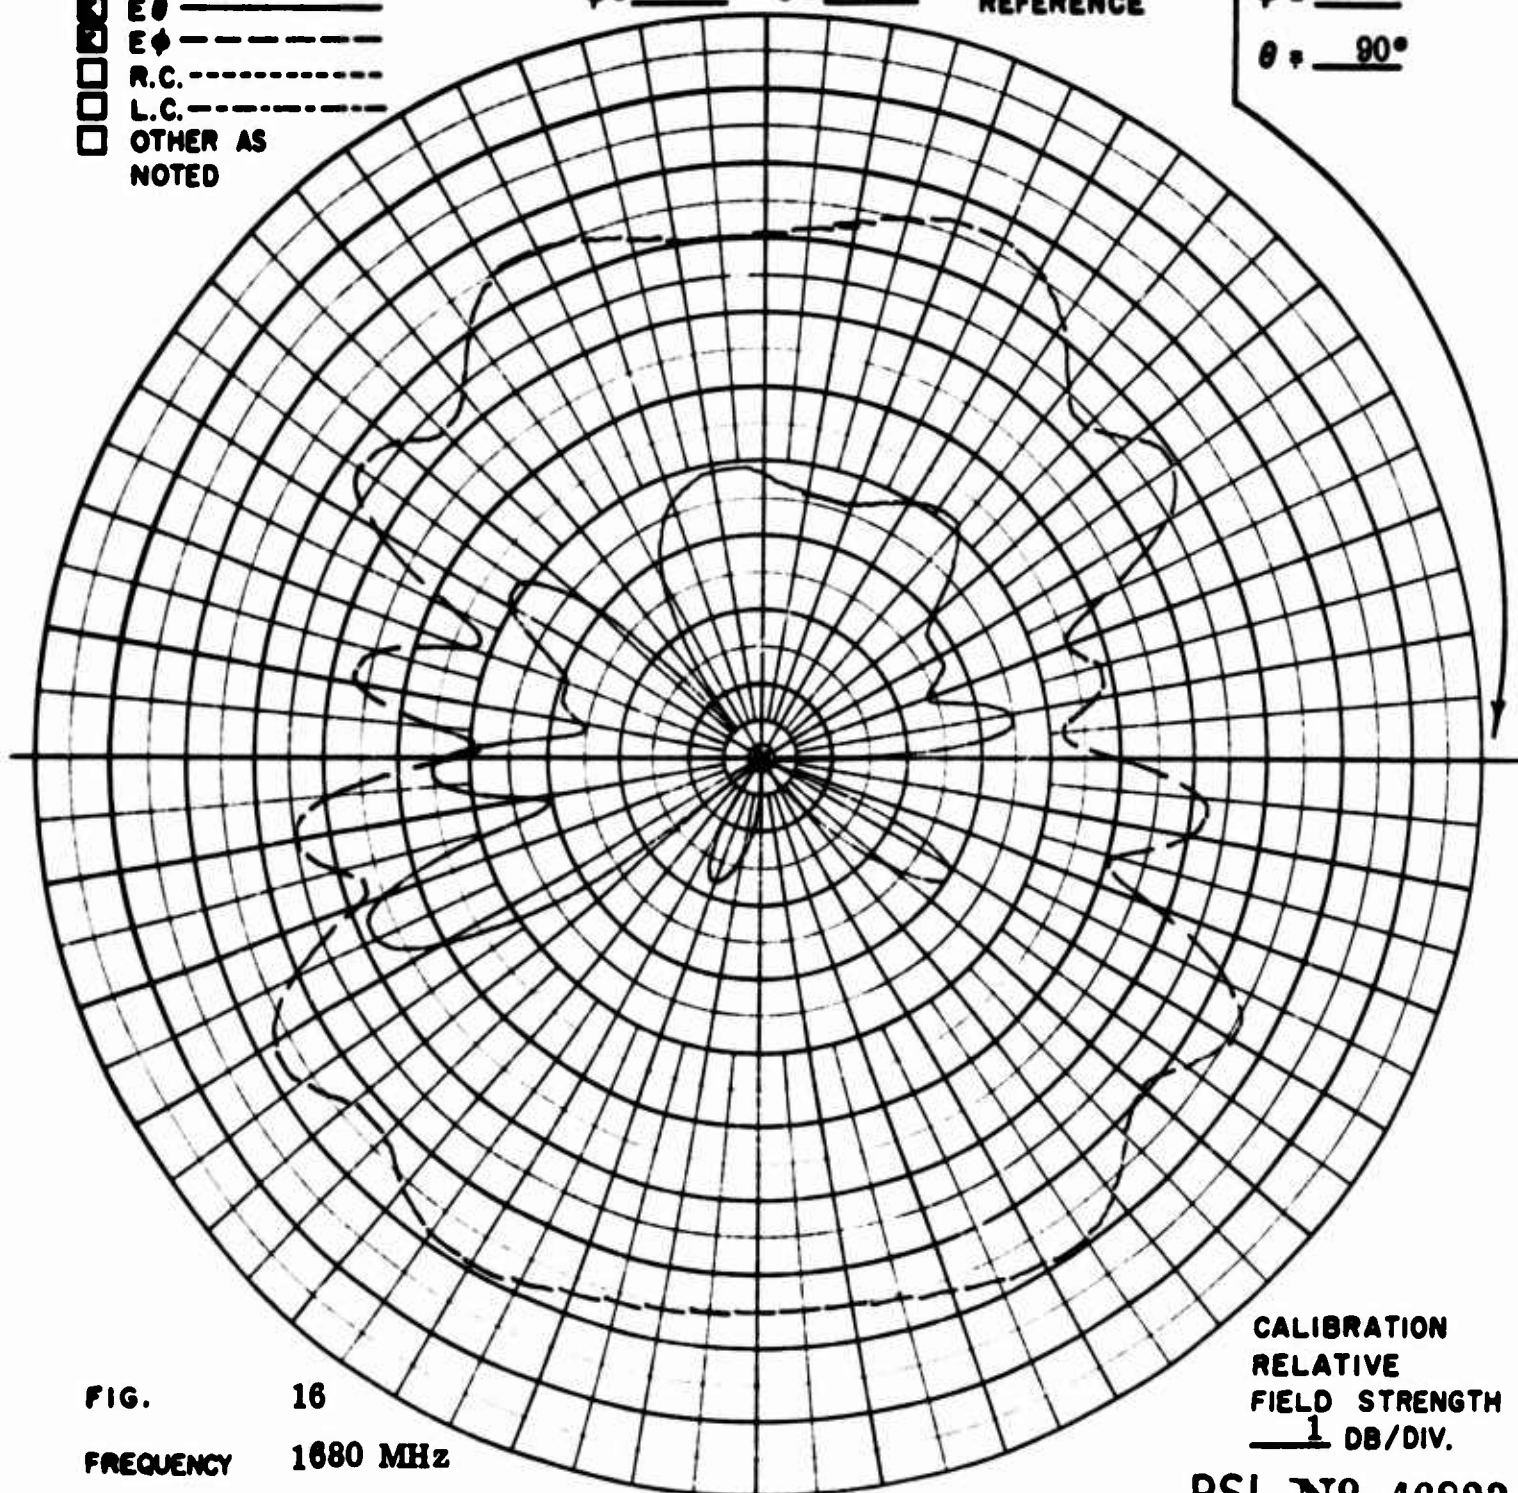


FIG. 16  
 FREQUENCY 1680 MHz  
 ANTENNA Model 24.006  
 REMARKS

CALIBRATION  
 RELATIVE  
 FIELD STRENGTH  
 1 DB/DIV.

PSI N° 46823

## POLARIZATION

- ☐ GAIN REF - - - -  
☒ E $\theta$  - - - -  
☒ E $\phi$  - - - -  
☐ R.C. - - - -  
☐ L.C. - - - -  
☐ OTHER AS NOTED

$\phi = \underline{\hspace{1cm}}$   $\theta = \underline{0^\circ}$  COORDINATE  
 REFERENCE

$\phi = \underline{110^\circ}$   
 $\theta = \underline{90^\circ}$

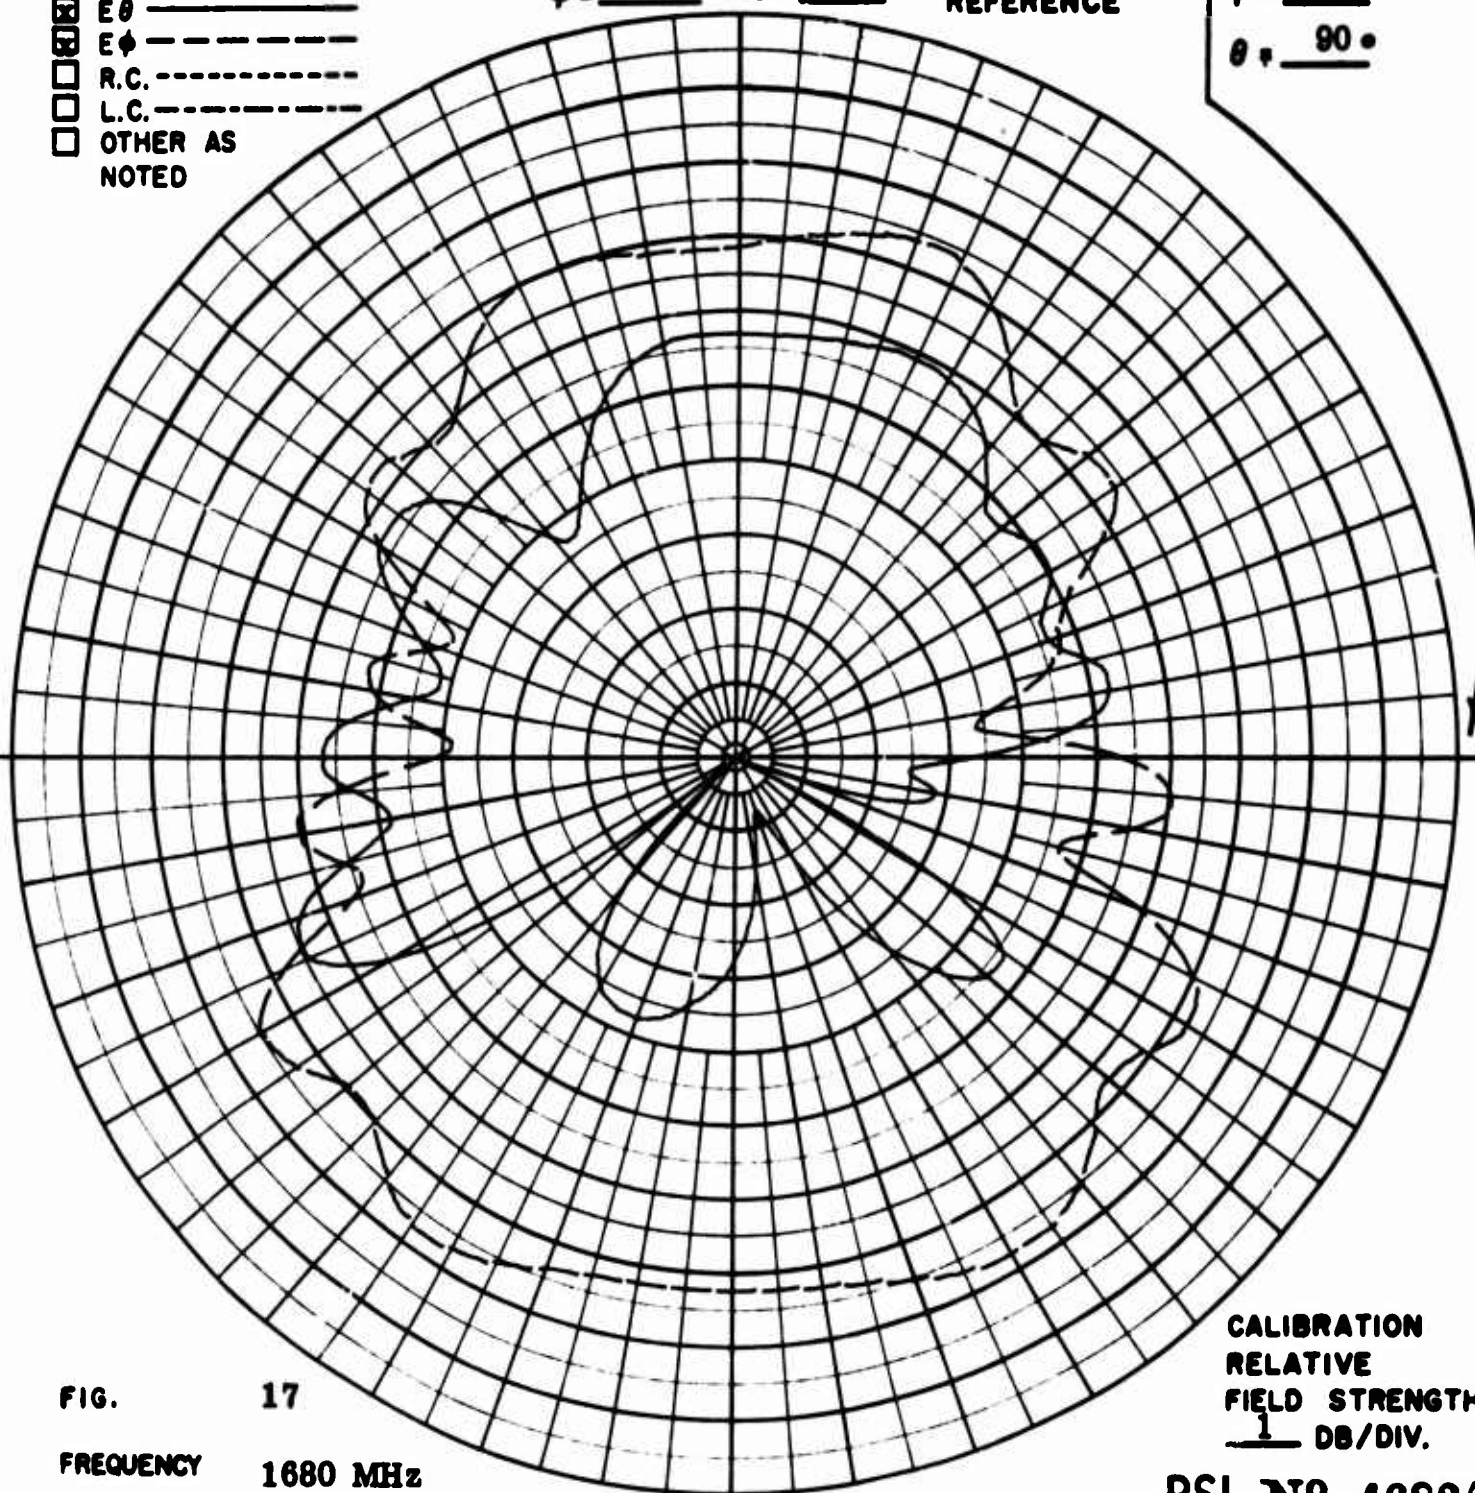


FIG. 17  
 FREQUENCY 1680 MHz  
 ANTENNA Model 24.006  
 REMARKS

CALIBRATION  
 RELATIVE  
 FIELD STRENGTH  
 1 DB/DIV.

PSL N° 46824



## POLARIZATION

- ☐ GAIN REF - - - - -  
☒  $E_\theta$  - - - - -  
☒  $E_\phi$  - - - - -  
☐ R.C. - - - - -  
☐ L.C. - - - - -  
☐ OTHER AS NOTED

$\phi = \underline{\hspace{1cm}}$  °     $\theta = \underline{0}$  °    COORDINATE  
 REFERENCE

$\phi = \underline{120}$  °  
 $\theta = \underline{90}$  °

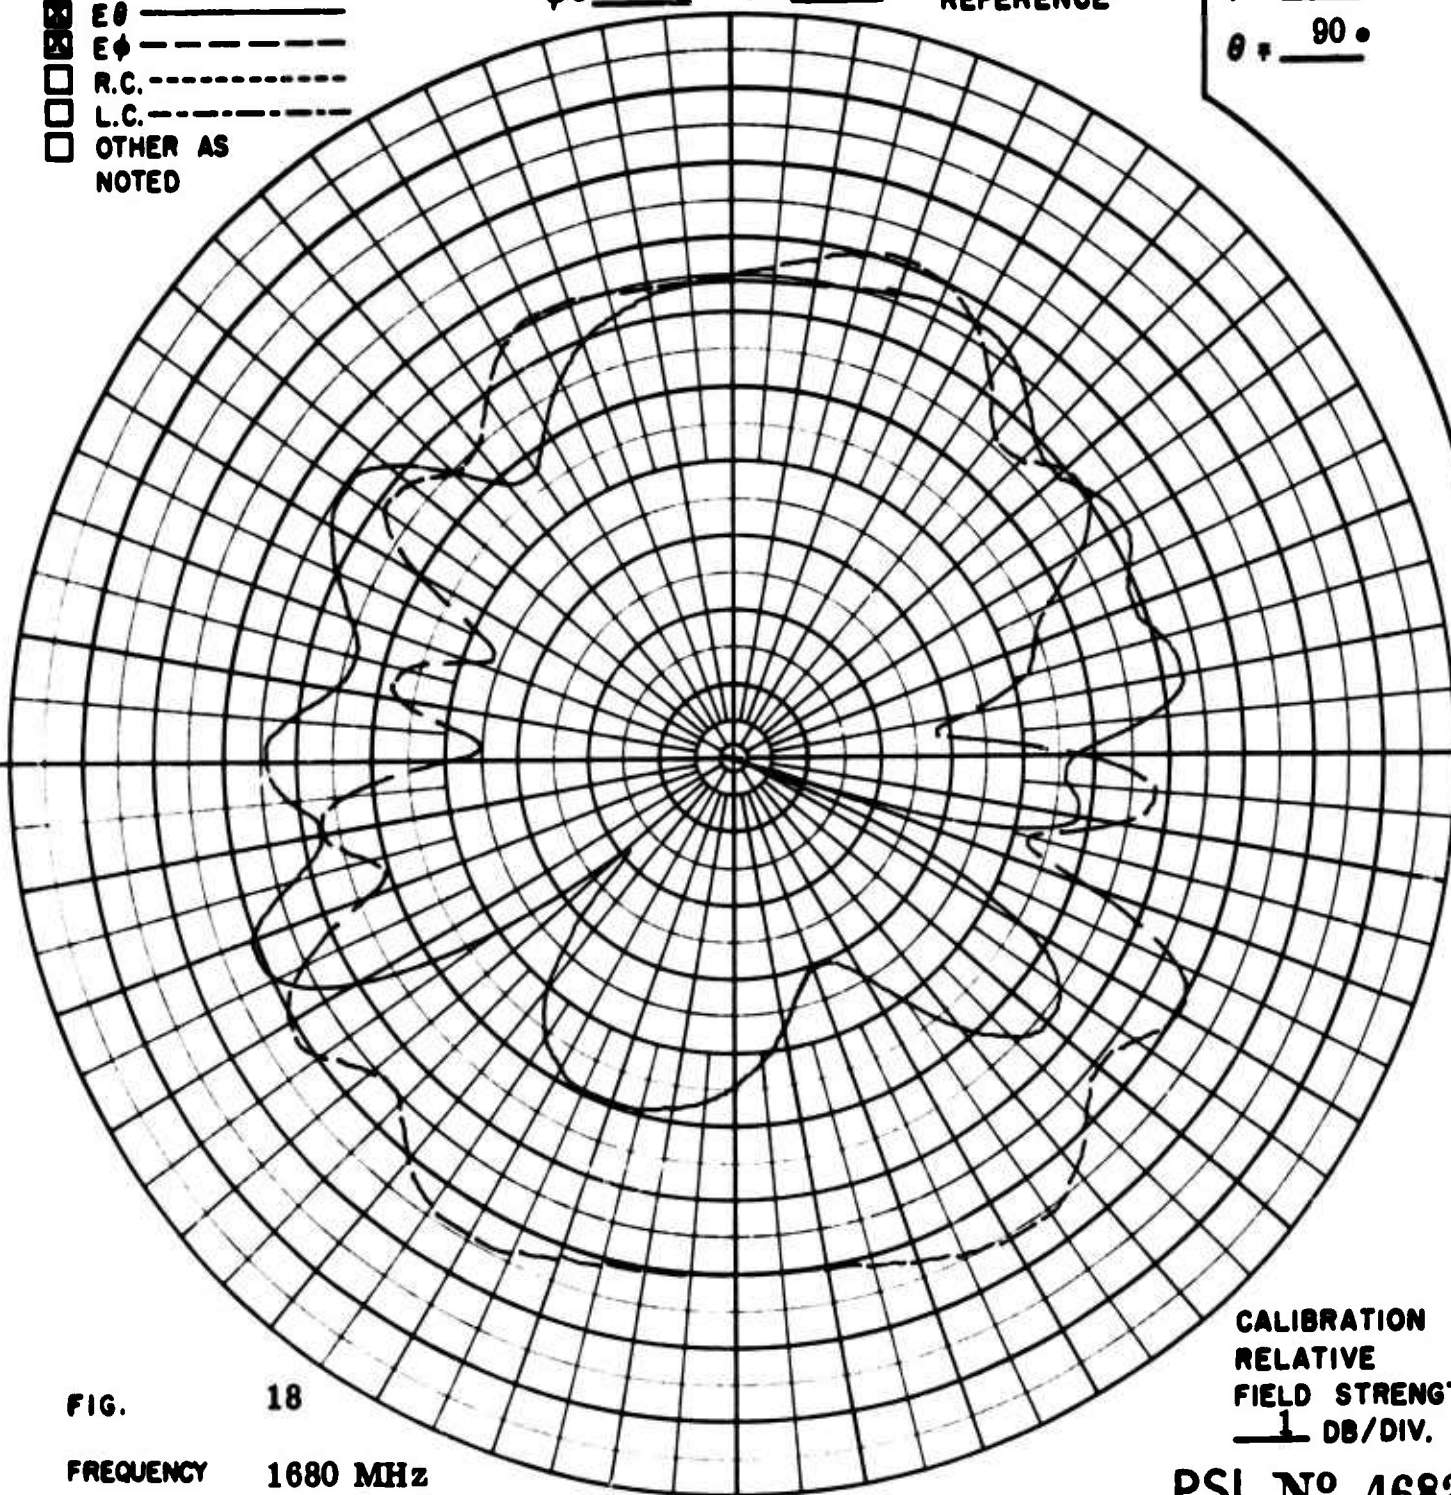


FIG. 18  
 FREQUENCY 1680 MHz  
 ANTENNA Model 24.006  
 REMARKS

CALIBRATION  
 RELATIVE  
 FIELD STRENGTH  
 1 DB/DIV.

PSL N° 46825

## POLARIZATION

- ☐ GAIN REF - - - -  
☒  $E\theta$  - - - -  
☒  $E\phi$  - - - -  
☐ R.C. - - - -  
☐ L.C. - - - -  
☐ OTHER AS NOTED

$\phi = \underline{\hspace{1cm}}^\circ$      $\theta = \underline{0}^\circ$     COORDINATE  
 REFERENCE

$\phi = \underline{130}^\circ$   
 $\theta = \underline{90}^\circ$

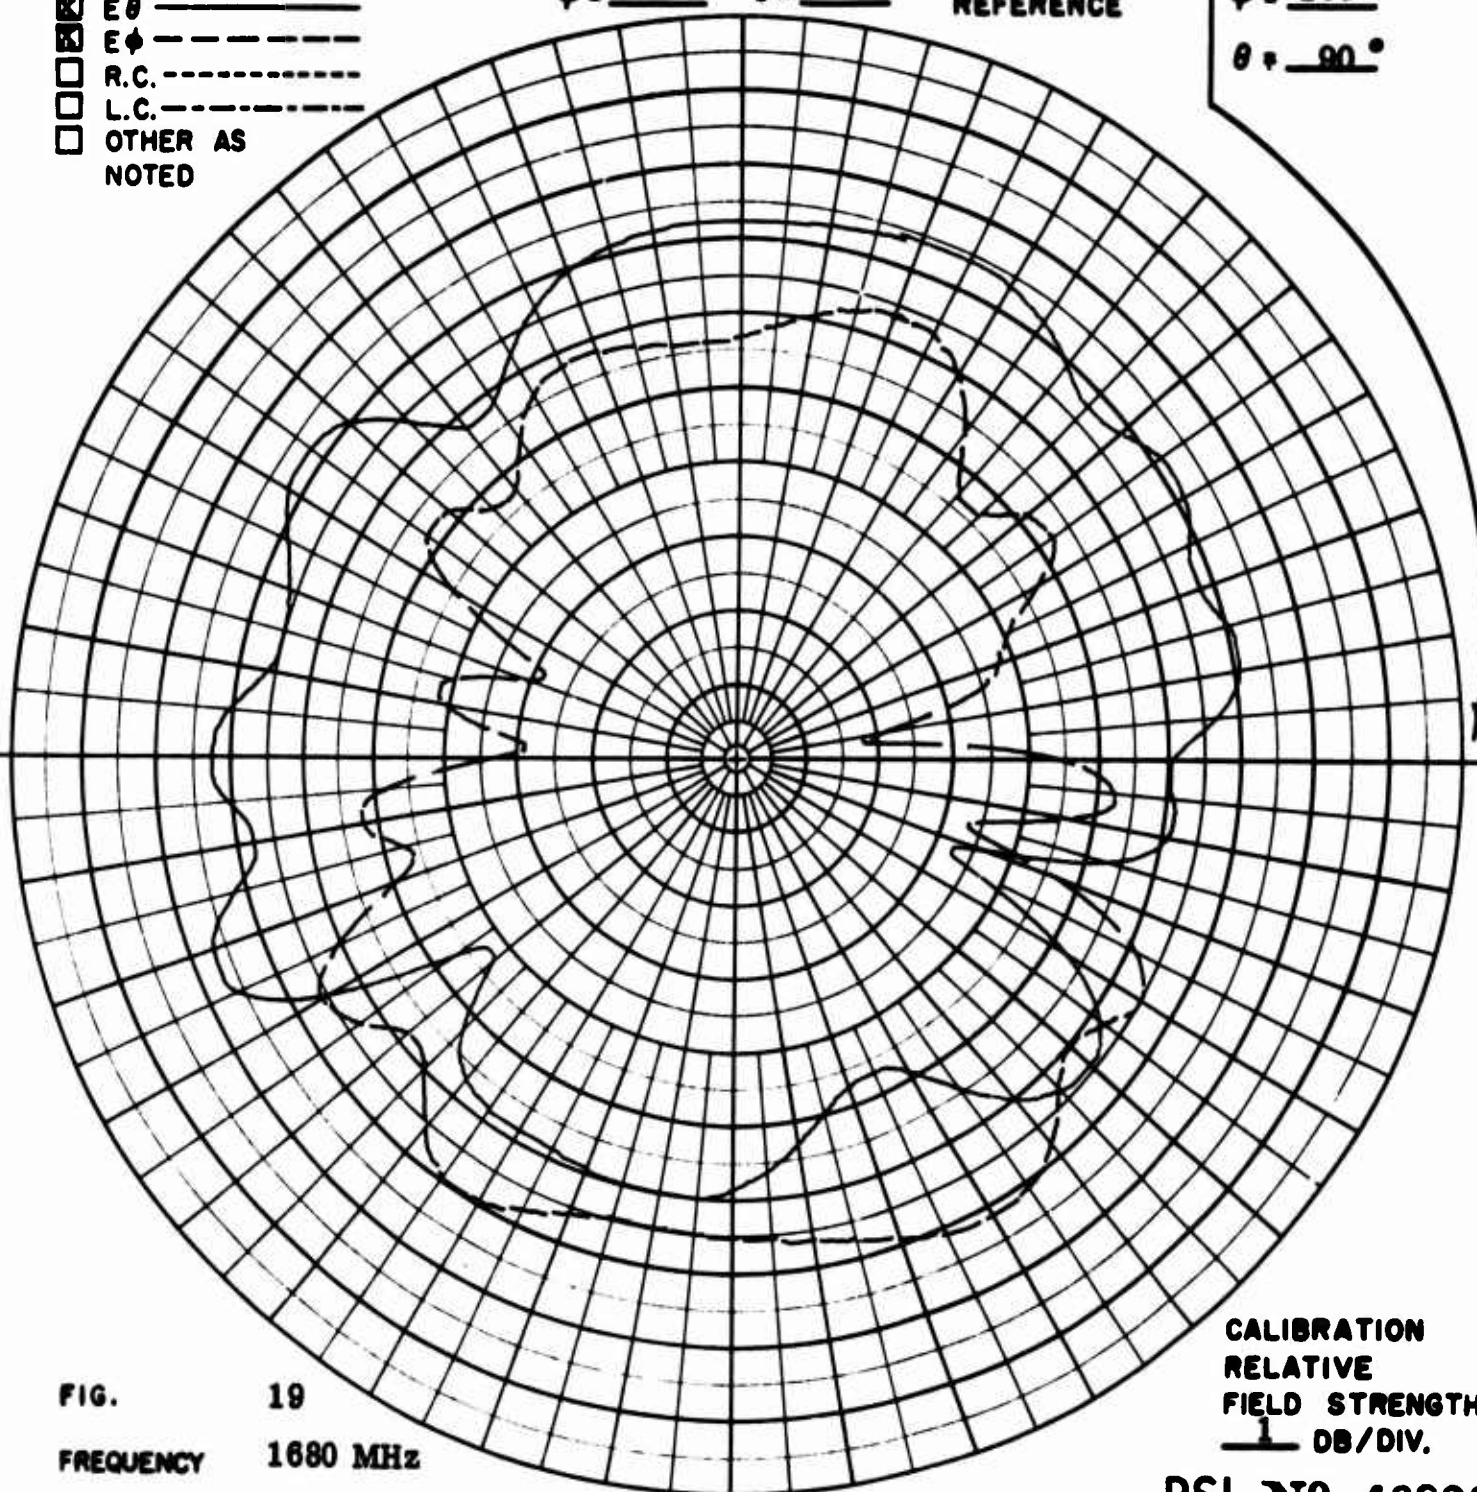


FIG. 19  
 FREQUENCY 1680 MHz  
 ANTENNA Model 24.006  
 REMARKS

CALIBRATION  
 RELATIVE  
 FIELD STRENGTH  
 1 DB/DIV.

PSL N° 46826

## POLARIZATION

- ☐ GAIN REF - - - - -  
☒  $E\theta$  - - - - -  
☒  $E\phi$  - - - - -  
☐ R.C. - - - - -  
☐ L.C. - - - - -  
☐ OTHER AS NOTED

$\phi = \underline{\hspace{1cm}}^\circ \quad \theta = \underline{0}^\circ$

COORDINATE  
REFERENCE

$\phi = \underline{140}^\circ$   
 $\theta = \underline{90}^\circ$

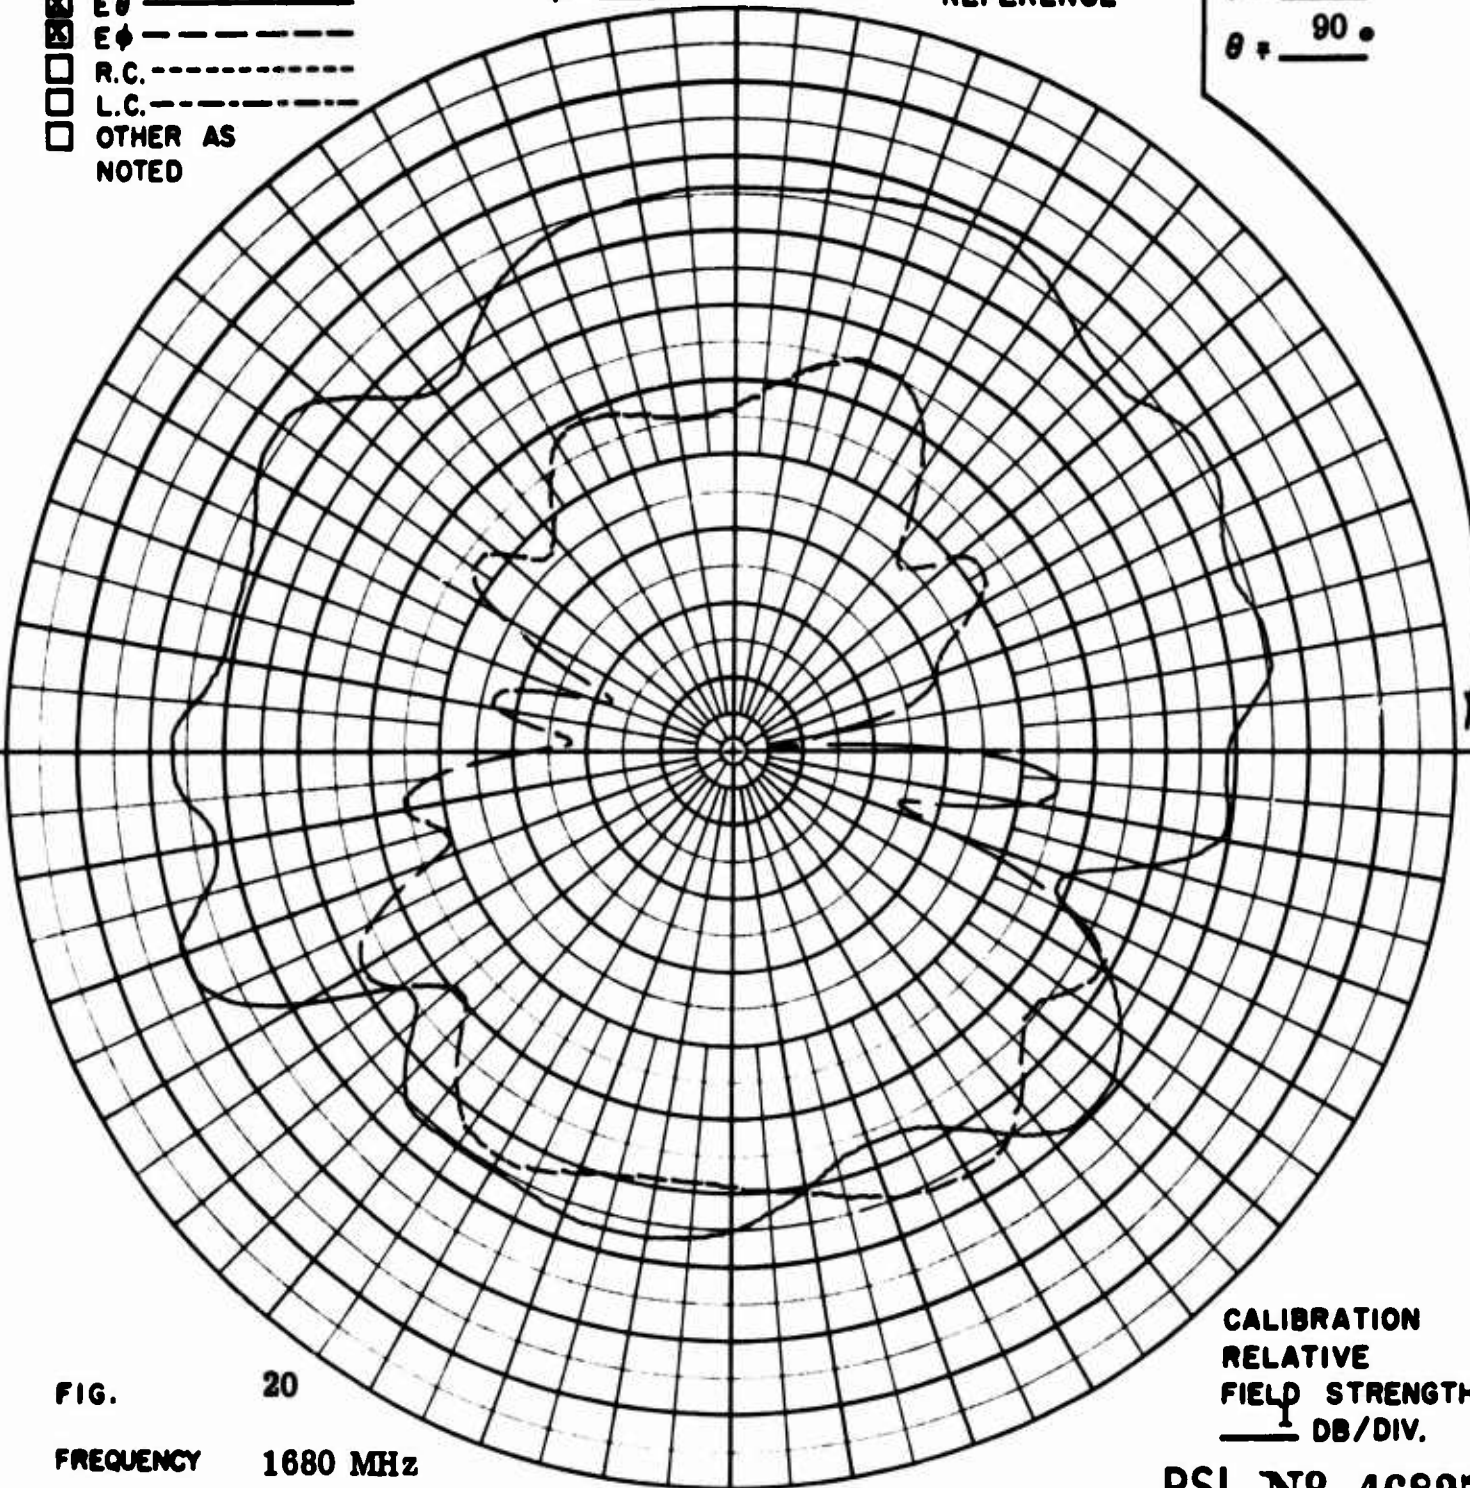


FIG. 20

FREQUENCY 1680 MHz

ANTENNA Model 24.006

REMARKS

CALIBRATION  
RELATIVE  
FIELD STRENGTH  
DB/DIV.

PSL N° 46827



## POLARIZATION

- ☐ GAIN REF - - - - -  
☒  $E_\theta$  - - - - -  
☒  $E_\phi$  - - - - -  
☐ R.C. - - - - -  
☐ L.C. - - - - -  
☐ OTHER AS NOTED

$\phi = \underline{\hspace{1cm}}^\circ \quad \theta = \underline{0}^\circ$

COORDINATE  
REFERENCE

$\phi = \underline{150}^\circ$   
 $\theta = \underline{90}^\circ$

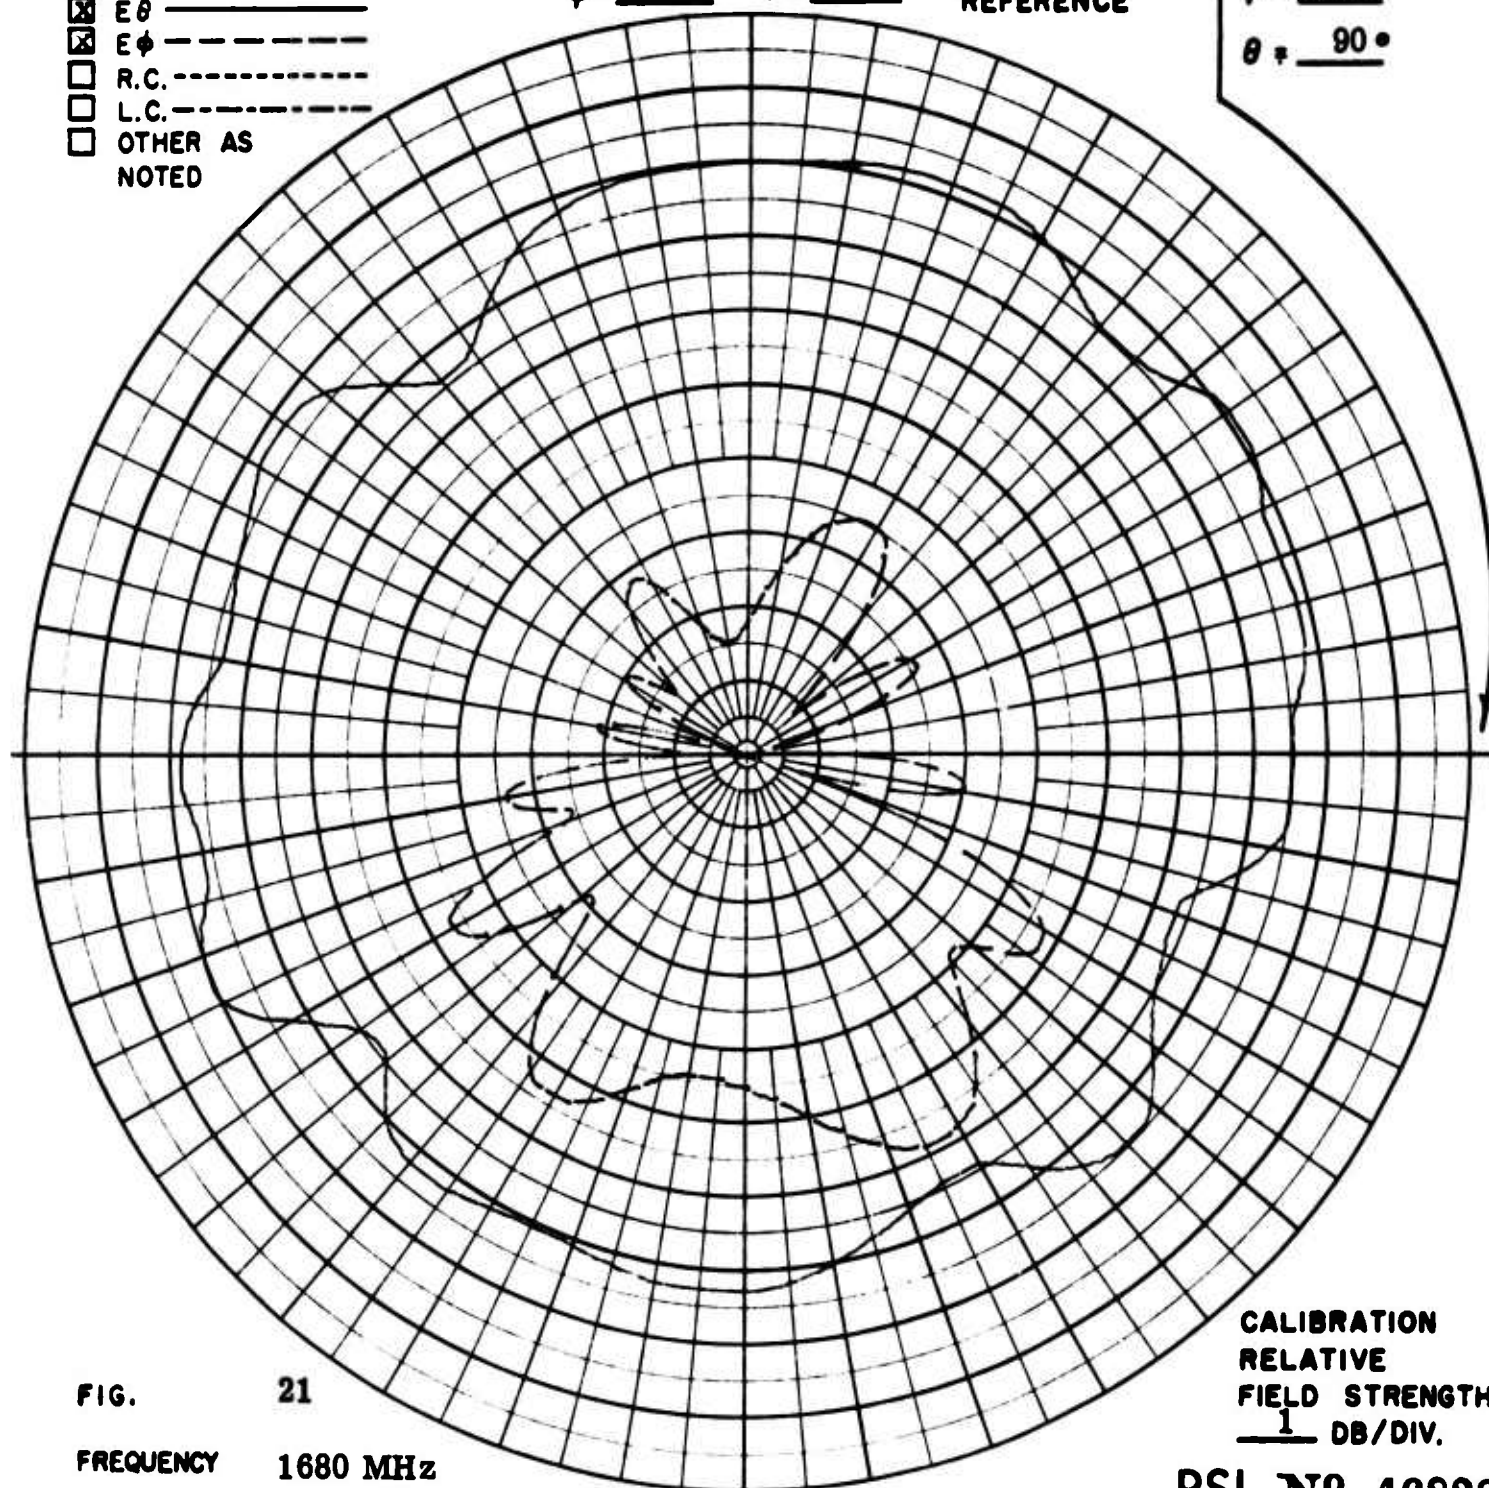


FIG.

21

FREQUENCY

1680 MHz

ANTENNA

Model 24.006

REMARKS

CALIBRATION  
RELATIVE  
FIELD STRENGTH  
1 DB/DIV.

PSL N° 46828

## POLARIZATION

- ☐ GAIN REF - - - - -  
☒ E $\theta$  - - - - -  
☒ E $\phi$  - - - - -  
☐ R.C. - - - - -  
☐ L.C. - - - - -  
☐ OTHER AS NOTED

$\phi =$  \_\_\_\_\_  $\theta =$  0°  
 COORDINATE REFERENCE

$\phi =$  160°  
 $\theta =$  90°

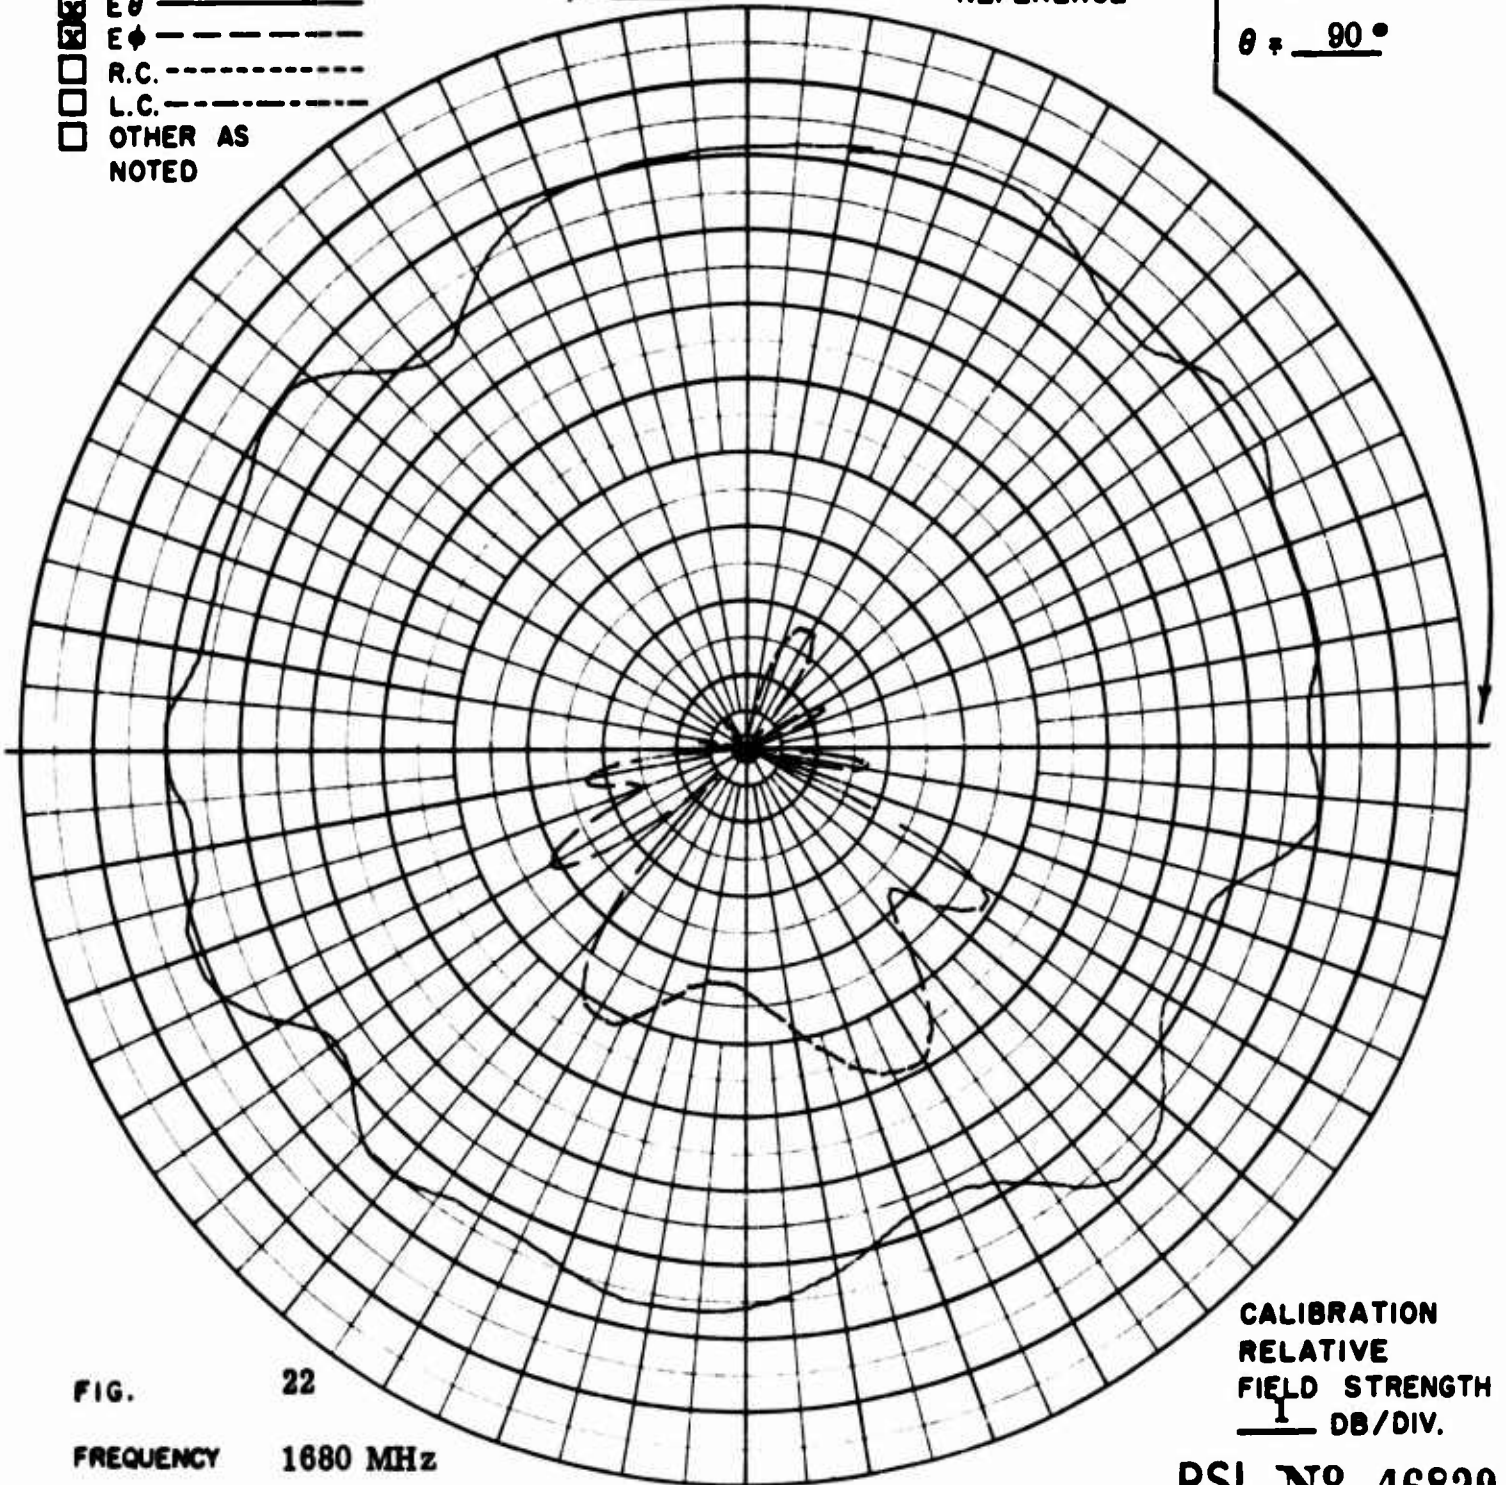


FIG. 22  
 FREQUENCY 1680 MHz  
 ANTENNA Model 24.006  
 REMARKS

CALIBRATION  
 RELATIVE  
 FIELD STRENGTH  
 1 DB/DIV.

PSL N° 46829

## POLARIZATION

- ☐ GAIN REF - - - -  
☒ E $\theta$  - - - -  
☒ E $\phi$  - - - -  
☐ R.C. - - - -  
☐ L.C. - - - -  
☐ OTHER AS NOTED

$\phi =$  \_\_\_\_\_  $\theta =$  0°  
 COORDINATE REFERENCE

$\phi =$  170°  
 $\theta =$  90°

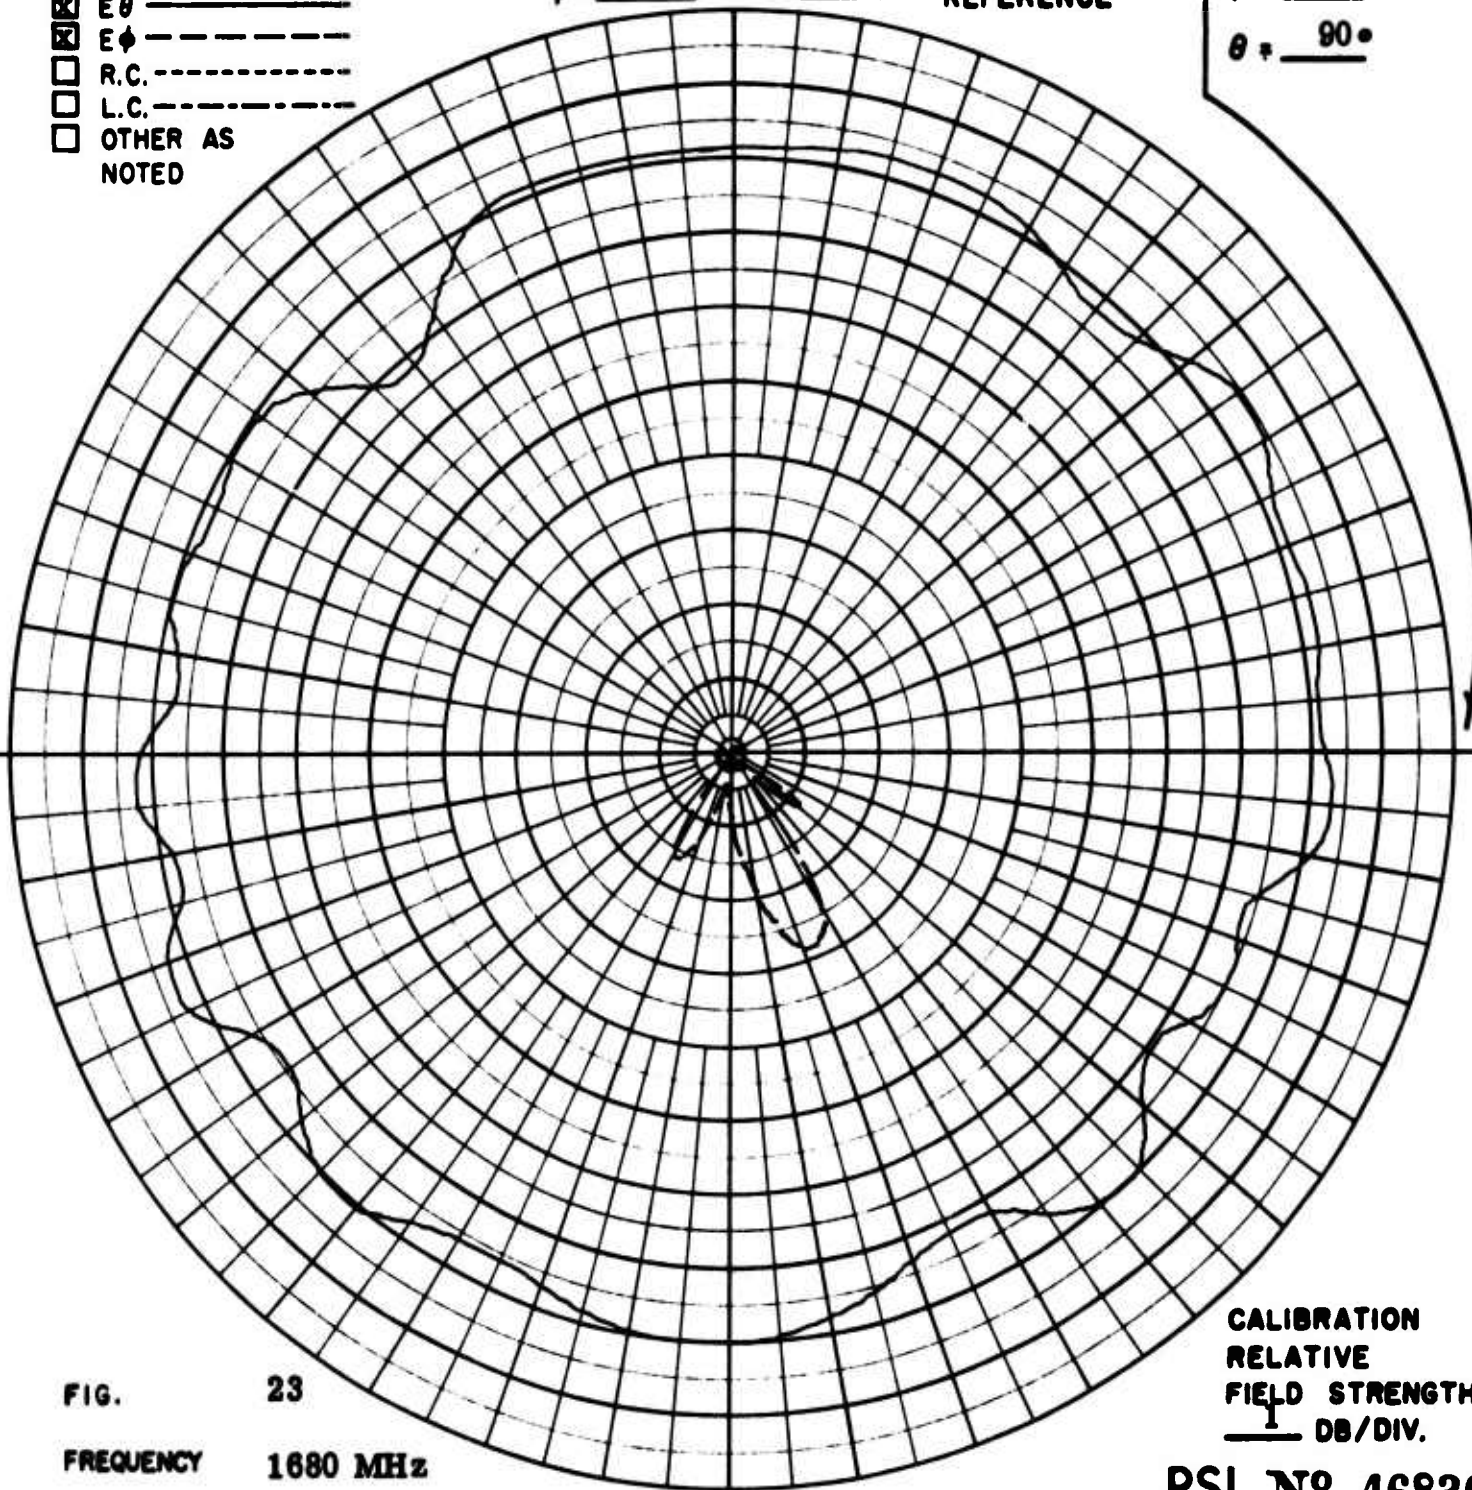


FIG. 23  
 FREQUENCY 1680 MHz  
 ANTENNA Model 24.006  
 REMARKS

CALIBRATION  
 RELATIVE  
 FIELD STRENGTH  
 DB/DIV.

PSL N° 46830



## POLARIZATION

- ☐ GAIN REF - - - -  
☒ E $\theta$  - - - -  
☒ E $\phi$  - - - -  
☐ R.C. - - - -  
☐ L.C. - - - -  
☐ OTHER AS NOTED

$\phi = \underline{\hspace{1cm}}$   $\theta = \underline{0}$

COORDINATE  
REFERENCE

$\phi = \underline{180^\circ}$   
 $\theta = \underline{90^\circ}$

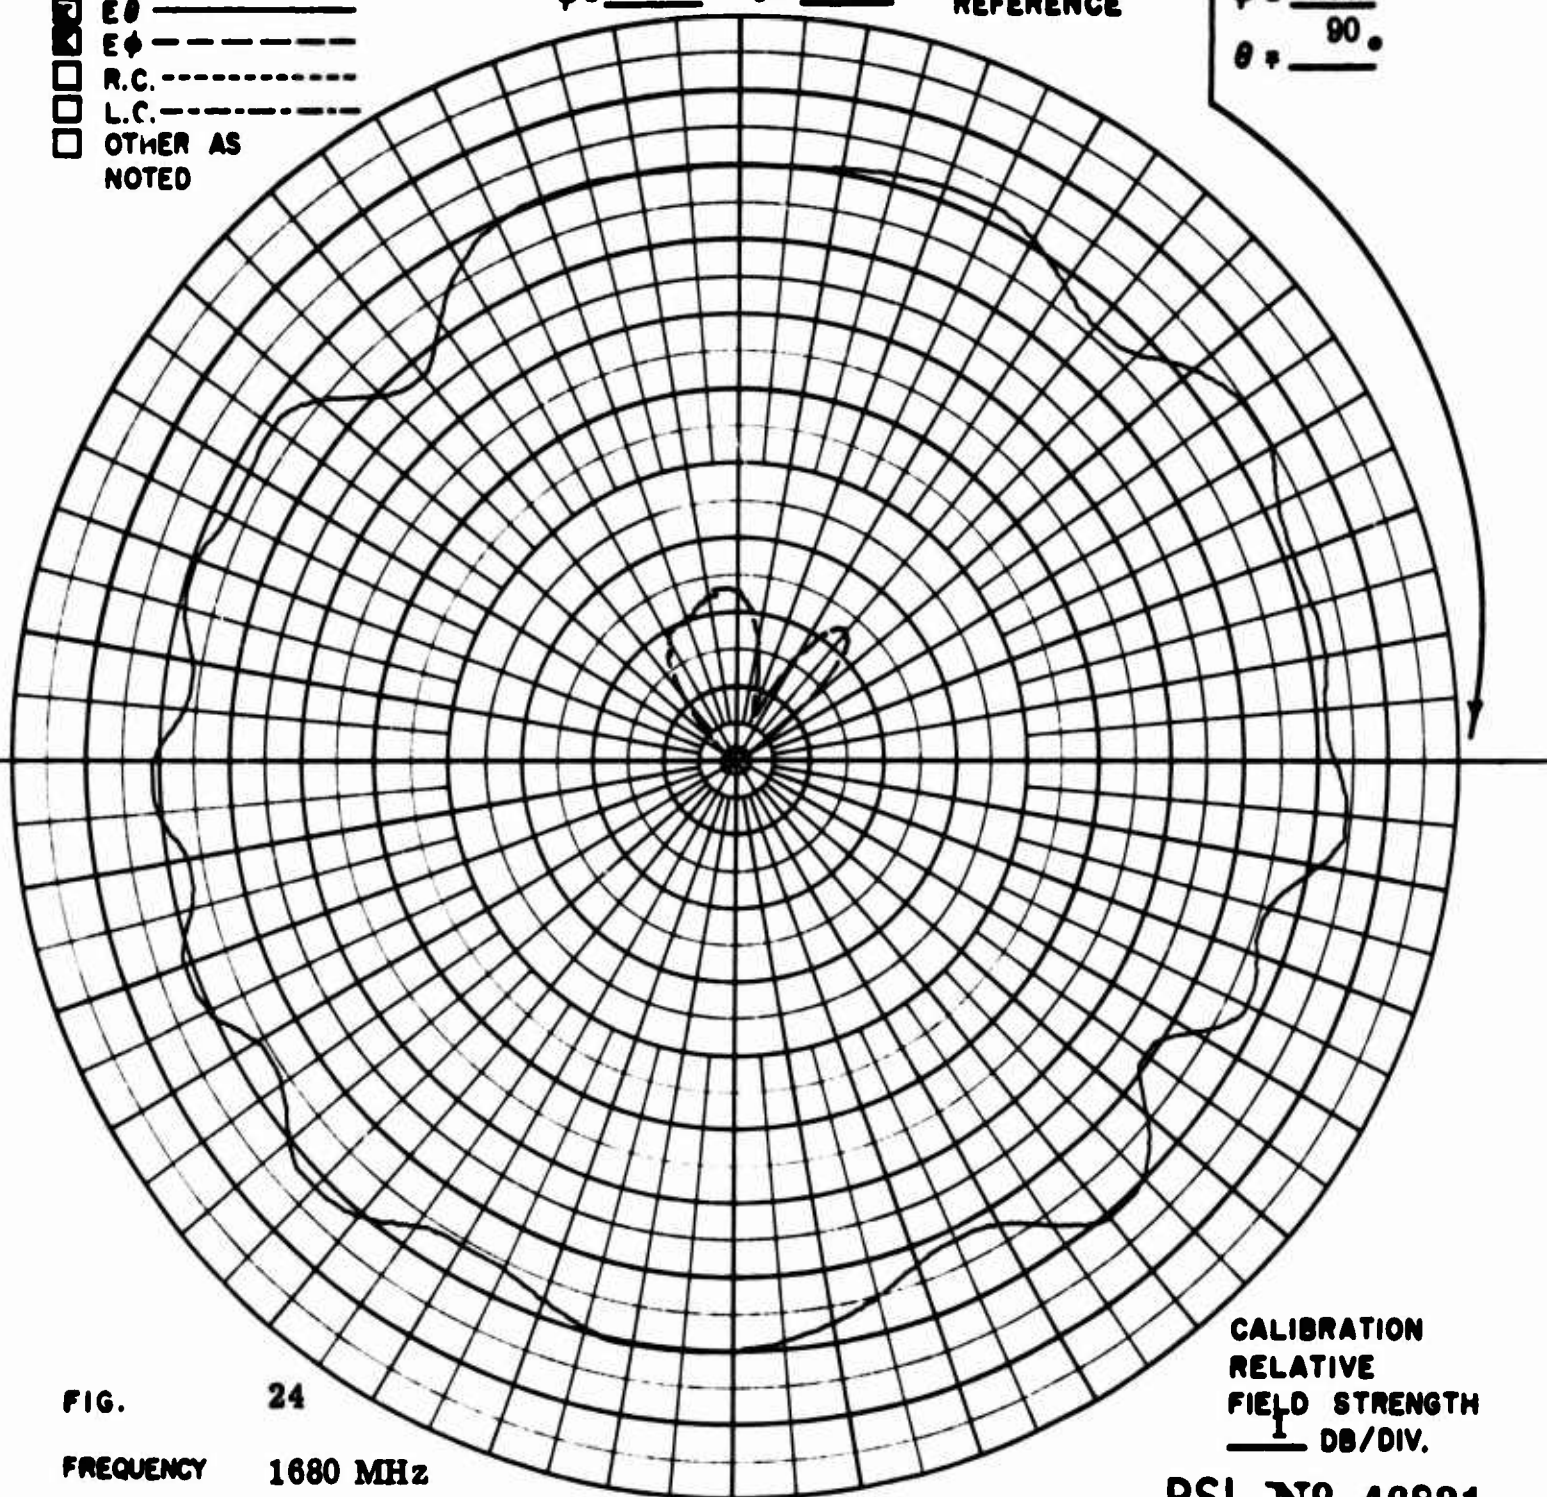


FIG. 24  
 FREQUENCY 1680 MHz  
 ANTENNA Model 24.006  
 REMARKS

CALIBRATION  
 RELATIVE  
 FIELD STRENGTH  
 1 DB/DIV.

PSL N° 46831

## POLARIZATION

- ☐ GAIN REF - - - -  
☒ E  $\theta$  - - - -  
☒ E  $\phi$  - - - -  
☐ R.C. - - - -  
☐ L.C. - - - -  
☐ OTHER AS NOTED

$\phi = \underline{\hspace{1cm}}$      $\theta = \underline{0^\circ}$     COORDINATE  
 REFERENCE

$\phi = \underline{270^\circ}$   
 $\theta = \underline{90^\circ}$

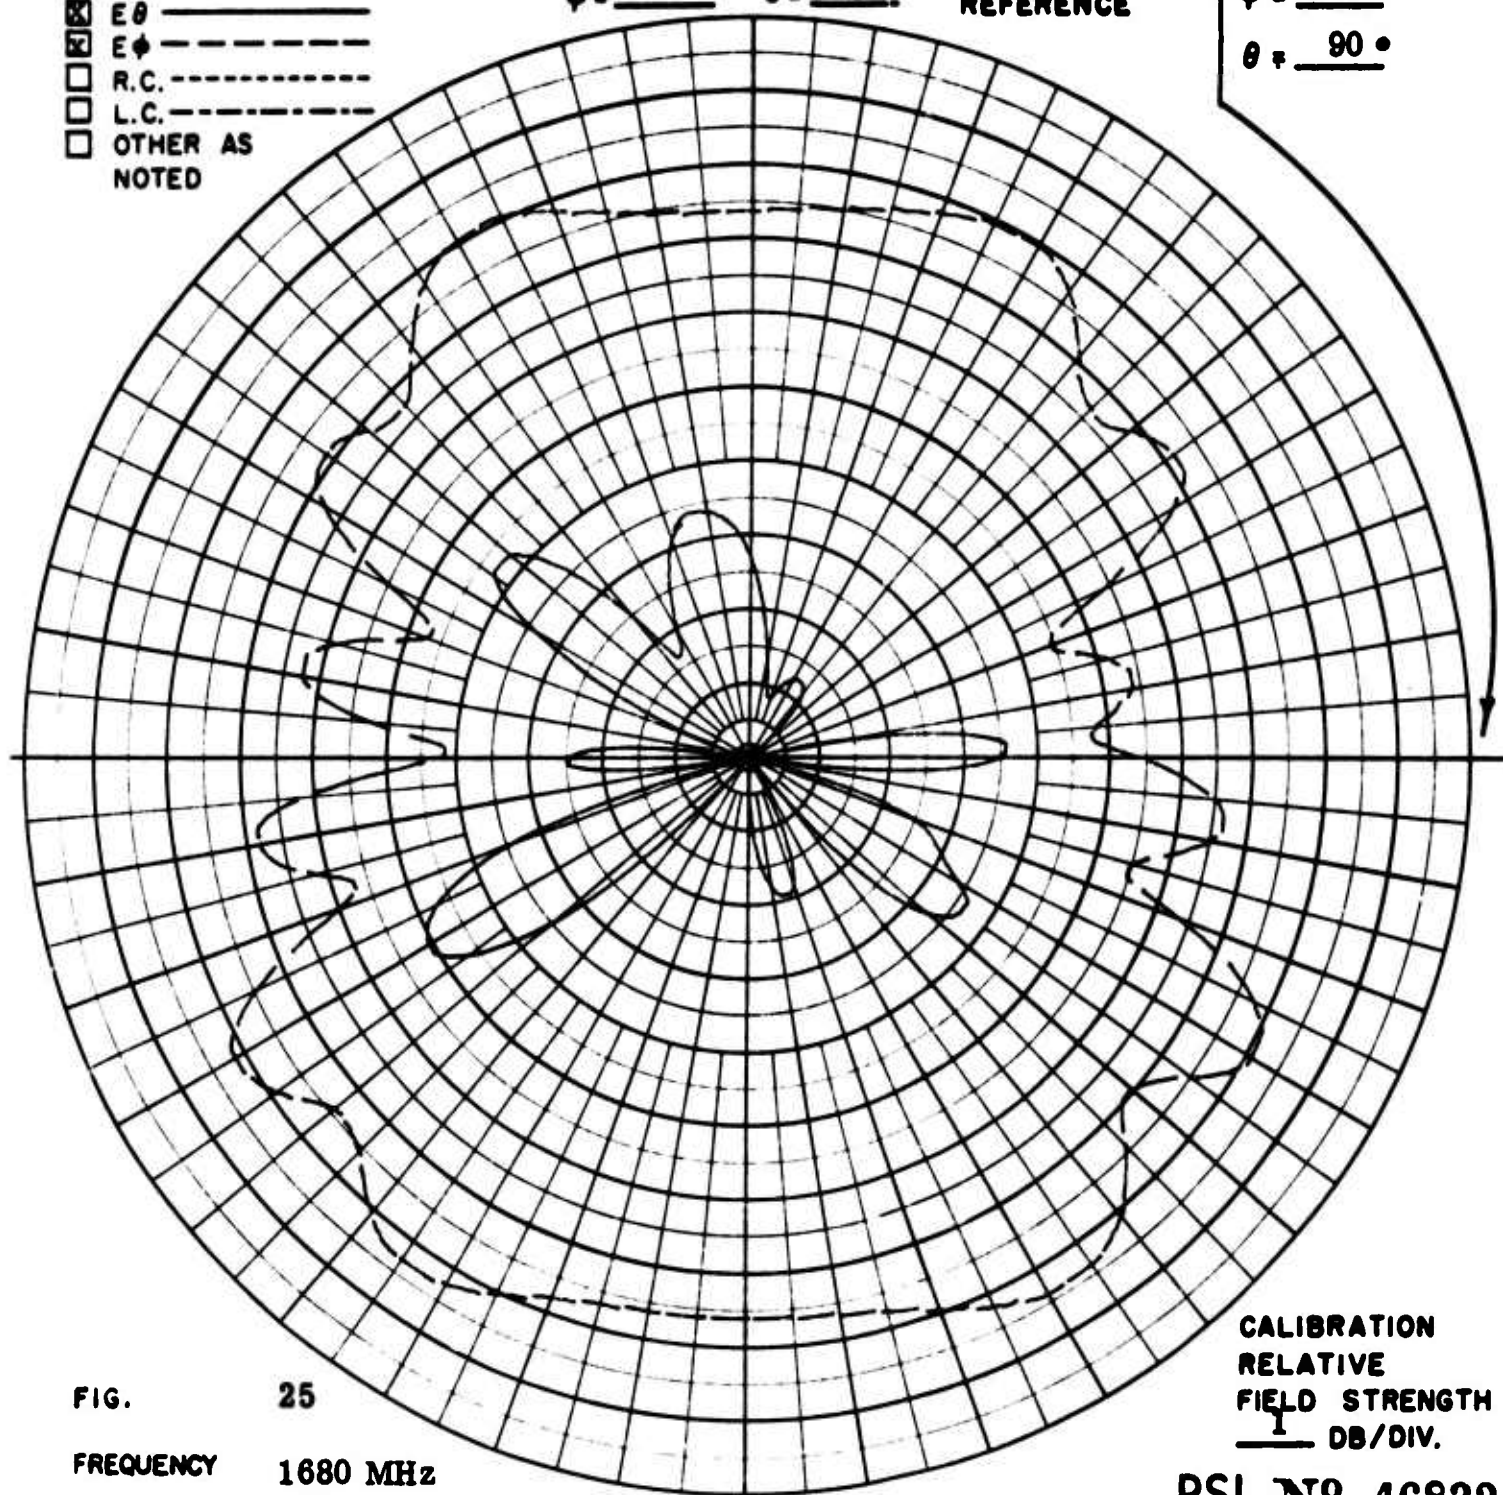


FIG. 25

FREQUENCY 1680 MHz

ANTENNA Model 24.006

REMARKS

CALIBRATION  
 RELATIVE  
 FIELD STRENGTH  
 1 DB/DIV.

PSL N° 46832



## POLARIZATION

- ☐ GAIN REF - - - -  
☒  $E_\theta$  - - - -  
☒  $E_\phi$  - - - -  
☐ R.C. - - - -  
☐ L.C. - - - -  
☐ OTHER AS NOTED

$\phi = 0^\circ$     $\theta = 90^\circ$    COORDINATE  
 REFERENCE

$\phi = 270^\circ$   
 $\theta = 90^\circ$

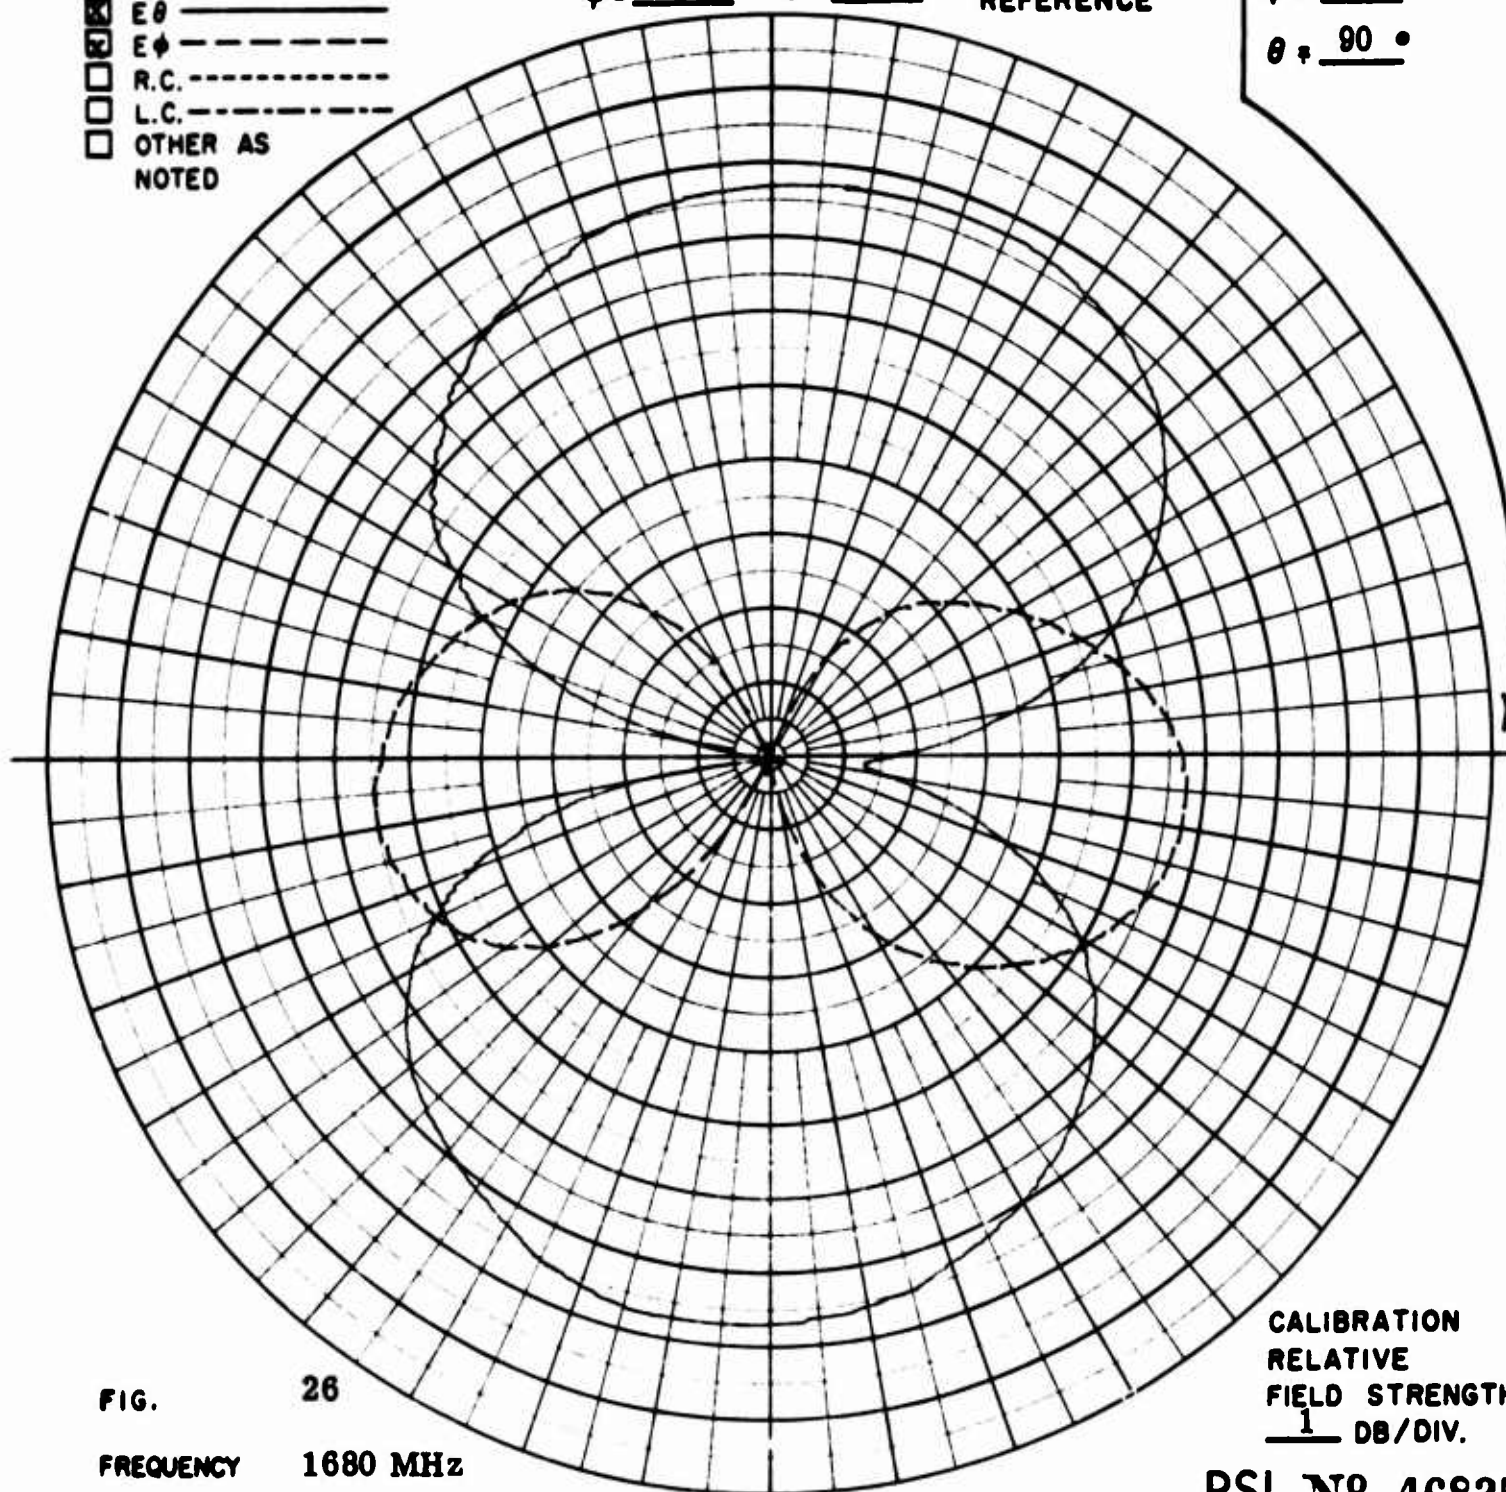
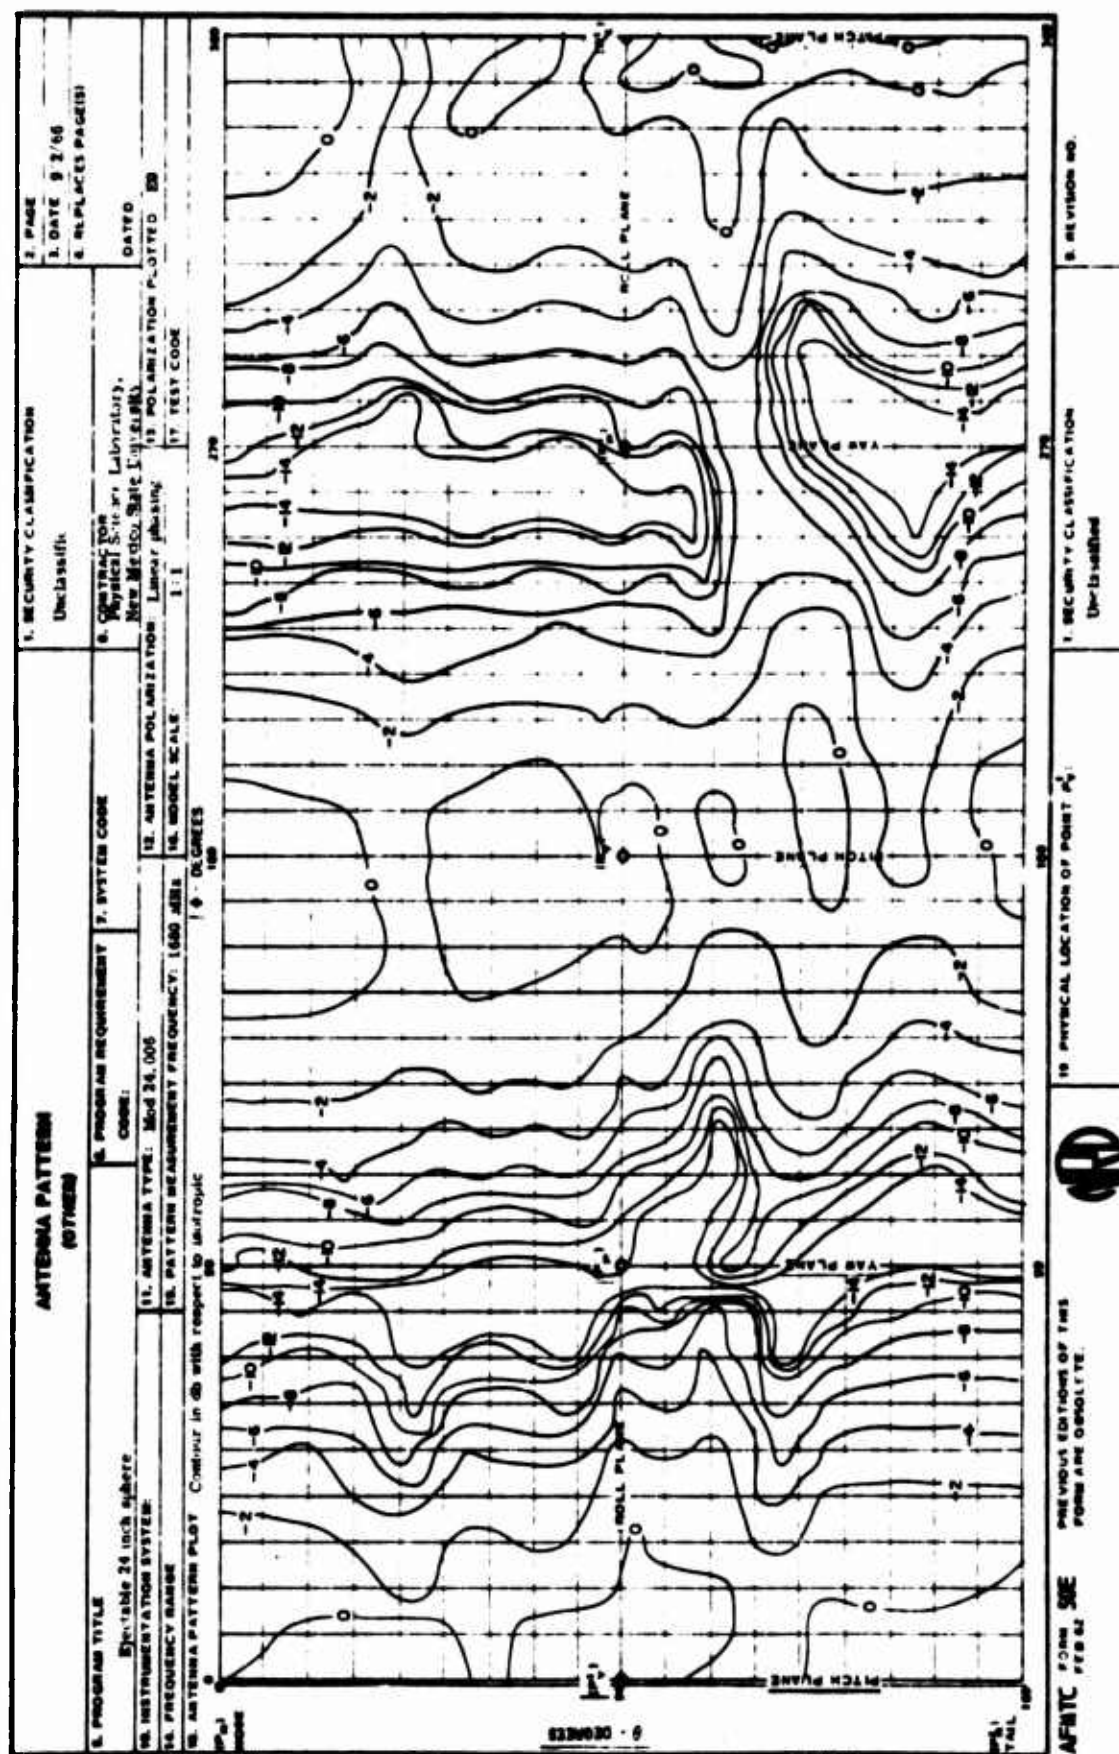


FIG. 26  
 FREQUENCY 1680 MHz  
 ANTENNA Model 24.006  
 REMARKS  $\theta = 90^\circ$  Plane pattern

CALIBRATION  
 RELATIVE  
 FIELD STRENGTH  
 1 DB/DIV.

PSI N° 46835



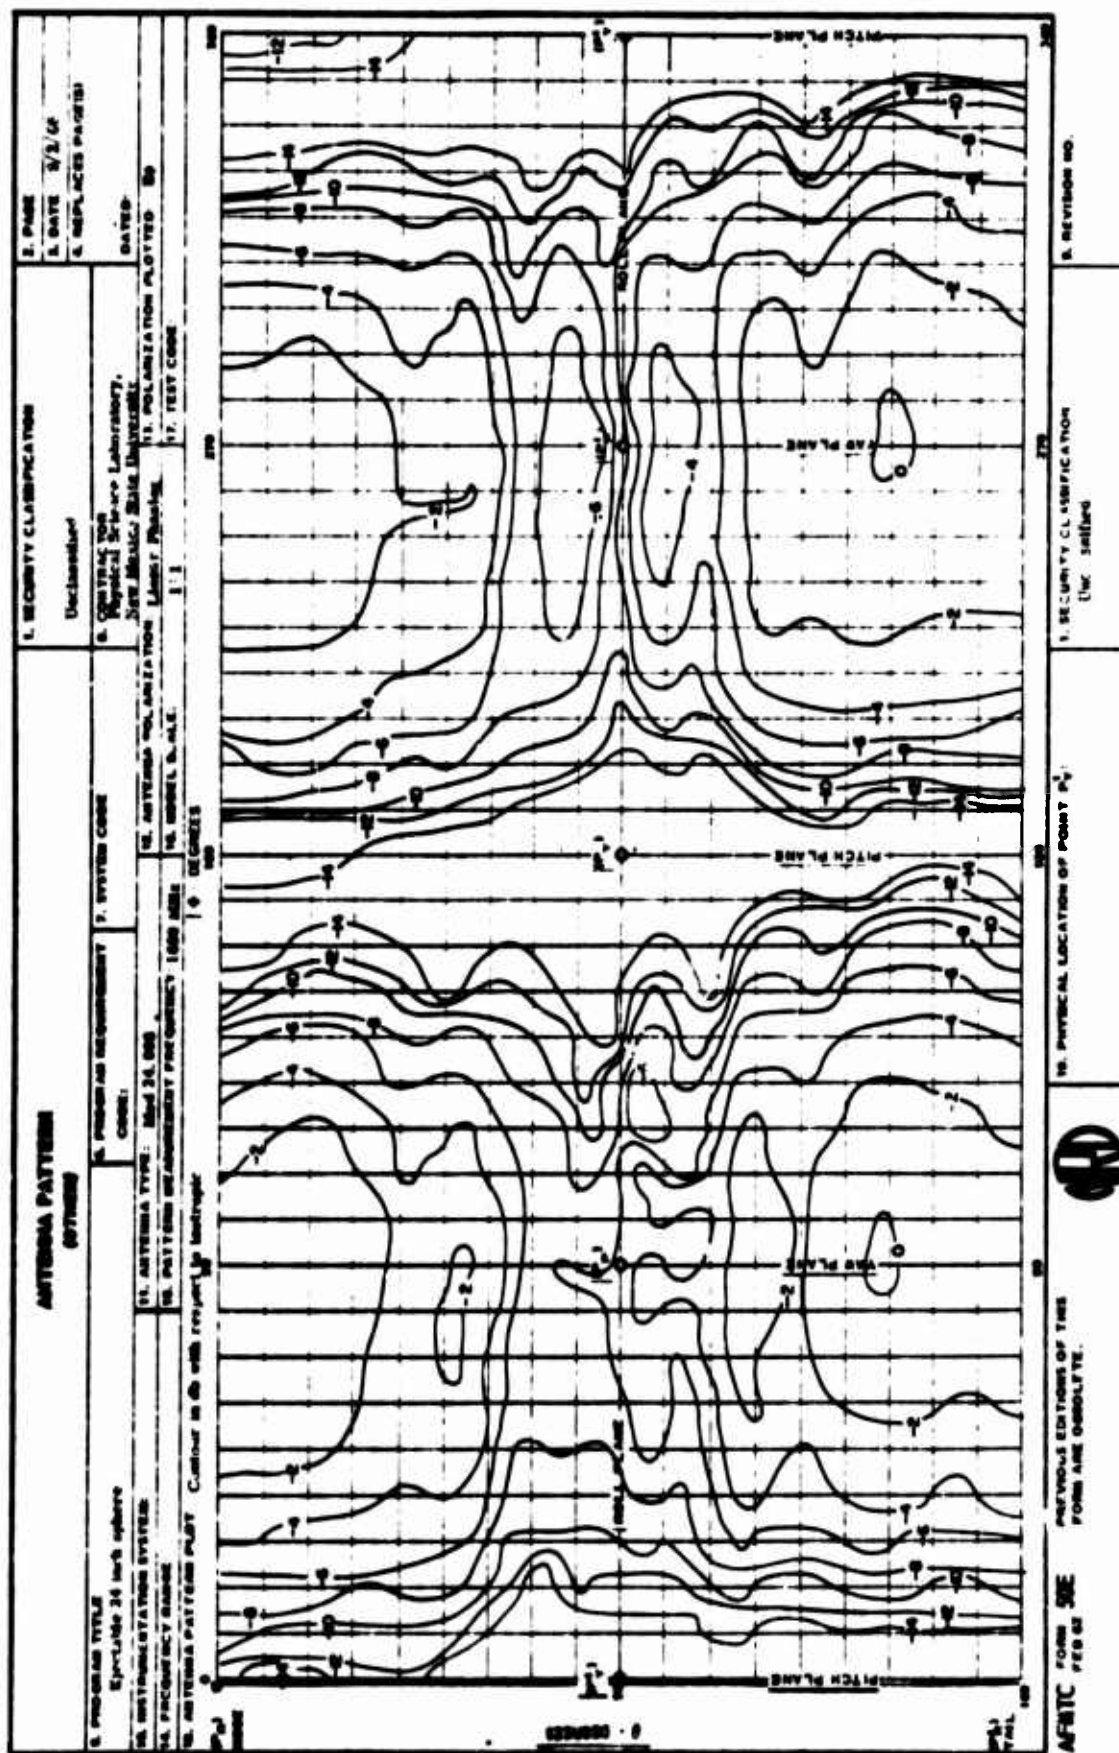


FIG. 28 - POWER CONTOUR PLOT OF MODEL 24.006 ANTENNA,  
 LINEAR  $E_\theta$  POLARIZATION

### BIBLIOGRAPHY

1. Haas, H. W., Quadraloop Antennas, Vol. 1, Physical Science Laboratory, December 1957.
2. Haas, H. W., An Antenna Radiation Pattern Measuring Research Instrument, Physical Science Laboratory, April 1963.
3. Henry, D. G., Design of Model 2.040 and 2.041 Quadraloop Antennas, Physical Science Laboratory, September 1963.
4. Henry, D. G., Telemetry Antenna for AE 7.347 Inflatable Sphere Experiment, Physical Science Laboratory, Scientific Report No. 6, Contract No. AF 19(628)-3229, December 1965.
5. Radiation Pattern Measurement Procedure for PSL Antenna Range, Physical Science Laboratory, Internal Report, July 1961.
6. Starkey, F., H. D. Weinschel, Model 6.007 Quadraloop Antennas for an Aerobee Rocket 1680 Mc Radio Sonde, Physical Science Laboratory, Scientific Report No. 5, Contract No. AF 19(628)-3229, November 1964.
7. Weinschel, H. D., Flush and Nonflush Mounted Telemetry Antennas, Flush Mounted Control Antennas, S-Band and C-Band Beacon Transponder Antennas, Antenna Systems for Specific Missiles, Probes and Satellites, Physical Science Laboratory, Final Report, Contract No. AF 19(604)-6198, October 1963.

Unclassified

Security Classification

## DOCUMENT CONTROL DATA - R&amp;D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY (Corporate author) New Mexico State University Physical Science Laboratory Las Cruces, New Mexico 88001		2a. REPORT SECURITY CLASSIFICATION Unclassified	
3. REPORT TITLE A 1680 MHZ ANTENNA FOR A TWENTY-FOUR INCH EJECTABLE SPHERE		2b. GROUP	
4. DESCRIPTIVE NOTES (Type of report and inclusive dates) Scientific Report Interim			
5. AUTHOR(S) (Last name, first name, initial) Henry, D. G.      Haas, H. W. (PD) Buller, B. T.			
6. REPORT DATE February 1967		7a. TOTAL NO. OF PAGES 32	7b. NO. OF REFS 7
8a. CONTRACT OR GRANT NO. AF19(628)-5923 b. PROJECT NO. 7043, 6682-04, 7659-01 c. DoD Element No. 65402124, 65402154, 62405394 d. DoD Subelement No. 632800, 676682		9a. ORIGINATOR'S REPORT NUMBER(S) Physical Science Laboratory Scientific Report No. 1 9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report) AFCRL-67-0238	
10. AVAILABILITY/LIMITATION NOTICES 681000  Distribution of this document is unlimited.			
11. SUPPLEMENTARY NOTES		12. SPONSORING MILITARY ACTIVITY Hq. AFCRL (CRE) United States Air Force L. G. Hanscom Field, Bedford, Mass. 01730	
13. ABSTRACT The PSL Model 24.006 quadraloop antenna was developed as a 1680 MHz telemetry antenna. The antenna is mounted on an ejectable twenty-four inch sphere, which is ejected from an Arcus type rocket. The antenna is designed to fit inside a nylon housing attached to the metal strut of the sphere. The Model 24.006 antenna was tested for radiation pattern, VSWR and mechanical integrity.			

DD FORM 1473

1 JAN 64

0101-807-6800

Unclassified

Security Classification



Unclassified  
Security Classification

14 KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
Antenna						
Quadraloop						
Tests						

INSTRUCTIONS

1. **ORIGINATING ACTIVITY:** Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (*corporate author*) issuing the report.

2a. **REPORT SECURITY CLASSIFICATION:** Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. **GROUP:** Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. **REPORT TITLE:** Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.

4. **DESCRIPTIVE NOTES:** If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. **AUTHOR(S):** Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. **REPORT DATE:** Enter the date of the report as day, month, year; or month, year. If more than one date appears on the report, use date of publication.

7a. **TOTAL NUMBER OF PAGES:** The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7b. **NUMBER OF REFERENCES:** Enter the total number of references cited in the report.

8a. **CONTRACT OR GRANT NUMBER:** If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. **PROJECT NUMBER:** Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

9a. **ORIGINATOR'S REPORT NUMBER(S):** Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. **OTHER REPORT NUMBER(S):** If the report has been assigned any other report numbers (*either by the originator or by the sponsor*), also enter this number(s).

10. **AVAILABILITY/LIMITATION NOTICES:** Enter any limitations on further dissemination of the report, other than those

imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through \_\_\_\_\_."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through \_\_\_\_\_."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through \_\_\_\_\_."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. **SUPPLEMENTARY NOTES:** Use for additional explanatory notes.

12. **SPONSORING MILITARY ACTIVITY:** Enter the name of the departmental project office or laboratory sponsoring (*paying for*) the research and development. Include address.

13. **ABSTRACT:** Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. **KEY WORDS:** Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical content. The assignment of links, roles, and weights is optional.